







## Foschi at a glance

Foschi is the leader in veterinary health care supplies in Italy and becoming an important international player. The Company was founded in 1905 and is 100% dedicated to the Veterinary market. Our catalogue has more than 20.000 references, ranging from equipment, to consumables, pharmaceuticals, imaging (x-ray and ultrasound), orthopaedic instrumentation, ophthalmology, anaesthesia, furniture and more: a single supplier for all veterinary needs.

From 2010 Foschi is part of the **Demas Group**, an Italian Company founded in 1968 from the Foglietti Family. Today, with more than **30 sales reps** in Italy, **150 employees** and over **10 international partners**, we are consider one of the fastest growing and trusted Companies of the European veterinary market.

#### Our mission & vision

*Mission* – We are committed to supply quality animal healthcare products, services and expertise, to support each veterinary professional in delivering the **highest standards in patient care** and run his practice in the most efficient and profitable way.

*Vision* – We want to be the preferred **global business partner** or the veterinarian and establish a winning network of partners and suppliers to create mutual, enduring value for a superior return on investment.

"FOSCHI: all your vet tools in one place."







## INDEX

















Release July 2020

HEAD QUARTERS: Via Di Salone, 132 - 00131 (RM)

T. +39 06 417.905.800 - F. +39 06 417.905.243







**f** @foschigroup



in Foschi S.r.l.






#### **QUALITY & TECHNOLOGICAL INNOVATION**

Selected products and wide range of high-end solutions



#### A COMPLETE OFFER

Products and solutions for your business

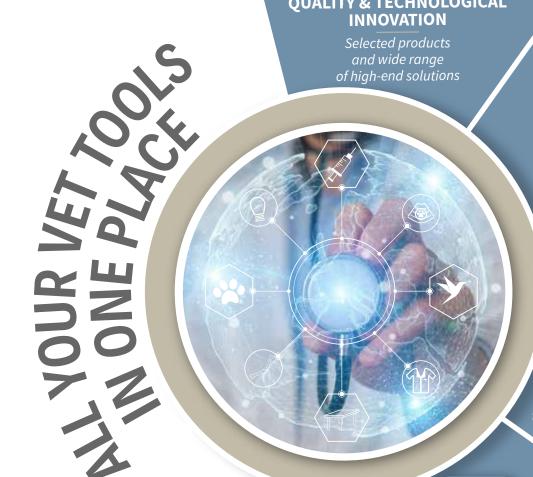



#### **CUSTOMER SERVICE**


Pre and after sale technical and operating support



## **SIMPLICITY AND RELIABILITY**

One partner for all your business needs



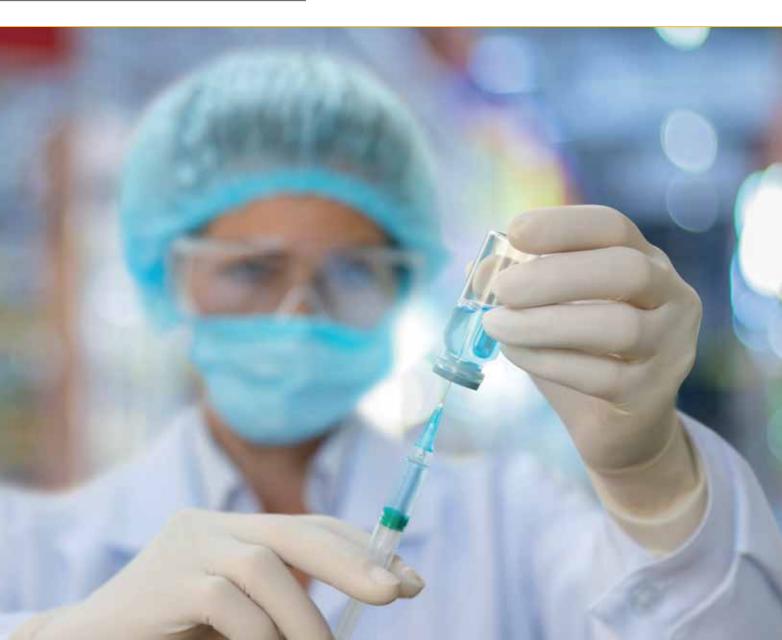

## **CONSUMABLES**




The veterinary medical consumable products that you use in daily practice can make a huge difference to the quality of care you are able to deliver. Our FOQUS line provides a range of everyday high-quality veterinary consumables at a great value price, giving you complete confidence in the safety and security in the demanding veterinary environment.

**PGCL** 

**TYPOLOGY:** Monofilament absorbable synthetic suture **COLOR:** Violet or undyed

**MOLECULE:** Copolymer composed of 75% glycolide and 25%  $\epsilon$ -caprolactone (PGA-PCL) **COATING TYPE:** Uncoated

CODE	DESCRIPTION
00005737	USP 2/0 Cutting edge, 3/8 Circle, 24 mm 70 cm Undyed
00005738	USP 2/0 Cutting edge, 3/8 Circle 24 mm 70 cm Violet
00005735	USP 2/0 Round body, 1/2 Circle 26 mm 70 cm Violet
00005740	USP 2/0 Round body, 1/2 Circle 30 mm 70 cm Violet
00005742	USP 3/0 Round body, 1/2 Circle 22 mm 70 cm Violet
00005739	USP 3/0 Cutting edge, 3/8 Circle 24 mm 70 cm Violet
00005736	USP 3/0 Round body, 1/2 Circle 26 mm 70 cm Violet
00005741	USP 3/0 Round body, 1/2 Circle 30 mm 70 cm Violet
00006473	USP 4/0 Round body, 1/2 Circle 22 mm 70 cm Viola
00006474	USP 4/0 Round body, 1/2 Circle 20 mm 70 cm Viola
00006475	USP 5/0 Round body, 1/2 Circle 17 mm 70 cm Viola



**PDO** 


TYPOLOGY: Monofilament absorbable synthetic suture COLOR: Violet

MOLECULE: Polidioxanone COATING TYPE: Uncoated

**PACKAGE 12 PIECES** 

**PACKAGE 12 PIECES** 

CODE	DESCRIPTION
00005743	USP 0 Round body, 1/2 Circle 26 mm 70 cm Violet
00005752	USP 0 Round body, 1/2 Circle 36 mm 70 cm Violet
00005749	USP 2/0 Cutting edge, 3/8 Circle 26 mm 70 cm Violet
00005744	USP 2/0 Round body, 1/2 Circle 26 mm 70 cm Violet
00005751	USP 2/0 Round body, 1/2 Circle 30 mm 70 cm Violet
00005747	USP 3/0 Cutting edge, 3/8 Circle 18 mm 70 cm Violet
00005746	USP 3/0 Cutting edge, 3/8 Circle 24 mm 70 cm Violet
00005750	USP 3/0 Cutting edge, 3/8 Circle 26 mm 70 cm Violet
00005745	USP 3/0 Round body, Tapercut, 1/2 Circle 26 mm 70 cm Violet
00005753	USP 3/0 Round body, Tapercut 1/2 Circle 26 mm 70 cm Violet
00005748	USP 4/0 Cutting edge, 3/8 Circle 18 mm 70 cm Violet



NYLON	<b>TYPOLOGY:</b> Monofilament non-absorbable synthetic suture <b>COLOR:</b> Blue	MOLECULE: Polyamide 6 or P COATING TYPE: Uncoated
CODE	DESCRIPTION	
00005781	USP 0 Cutting edge 3/8 Circle 30 mm 75 cm Blue	_
00005777	USP 2/0 Cutting edge, 3/8 Circle 24 mm 75 cm Blue	
00005780	USP 2/0 Cutting edge, 3/8 Circle 26 mm 75 cm Blue	
00005778	USP 3/0 Cutting edge, 3/8 Circle 24 mm 75 cm Blue	
00005779	USP 4/0 Cutting edge, 3/8 Circle 18 mm 45 cm Blue	

Polyamide 6-6

**PACKAGE 12 PIECES** 



**PGA** 

**TYPE:** Braided and coated absorbable synthetic suture


COLOR: Violet o undyed (beige)

MOLECULE: Polyglycolic acid (PGA)

**COATING TYPE:** Polycaprolactone and calcium stearate

DESCRIPTION	PACKAGE 12 PIECES

CODE	DESCRIPTION	
00005787	USP 2 Mf. Braided Reel Sterile 250 Cm Violet	
00005782	USP1 Mf. Braided Reel Sterile 150 Cm Violet	
00005769	USP 1 Cutting edge 3/8 Circle 36 mm 90 cm Violet	
00005774	USP 0 Cutting edge. 1/2 Circle 26 mm 70 cm Violet	
00005767	USP 0 Cutting edge 3/8 Circle 30 mm 70 cm Violet	
00005754	USP 0 Round body 1/2 Circle 26 mm 70 cm Violet	
00005771	USP 0 Round body 1/2 Circle 30 mm 70 cm Violet	
00005783	USP 0 Mf. Braided Reel Sterile 250 cm Violet	
00005773	USP 2/0 Cutting edge 1/2 Circle 22 mm 70 cm Violet	
00005760	USP 2/0 Cutting edge 3/8 Circle 24 mm 70 cm Violet	
00005764	USP 2/0 Cutting edge 3/8 Circle 26 mm 70 cm Undyed	
00005791	USP 2/0 Cutting edge 3/8 Circle 26 mm 70 cm Violet	
00005768	USP 2/0 Cutting edge 3/8 Circle 30 mm 70 cm Violet	
00005776	USP 2/0 Cutting edge reinf 1/2 Circle 36 mm 70 cm Violet	
00005757	USP 2/0 Round body 1/2 Circle 26 mm 70 cm Violet	
00005772	USP 2/0 Round body 1/2 Circle 30 mm 70 cm Violet	
00005784	USP 2/0 Mf. Braided Reel Sterile 250 cm Violet	
00005762	USP 3/0 Cutting edge 3/8 Circle 18 mm 70 cm Violet	
00005761	USP 3/0 Cutting edge 3/8 Circle 24 mm 70 cm Violet	
00005765	USP 3/0 Cutting edge 3/8 Circle 26 mm 70 cm Violet	
00005775	USP 3/0 Cutting edge 1/2 Circle 26 mm 70 cm Violet	
00005770	USP 3/0 Round body 1/2 Circle 22 mm 70 cm Violet	
00005763	USP 3/0 Round body 3/8 Circle 24 mm 70 cm Violet	
00005758	USP 3/0 Round body 1/2 Circle 26 mm 70 cm Violet	
00005759	USP 4/0 Round body 1/2 Circle 26 mm 70 cm Violet	







**AQL** – a guarantee for quality. The Acceptable Quality Level (AQL) indicates the number of defects that may be accepted in a production lot of disposable gloves. The lower the AQL value is, the lower are the chances of having a defective glove. Average values of AQL on the market are between 1.5 and 4.0. All FOQUS gloves are certified with an AQL 0.65, meaning they guarantee the highest quality and a reduced risk of exposure.

## **LATEX GLOVES**

#### **POWDERED**

CODE	DESCRIPTION	QUANTITY
61620100	Size XS	100 Pcs
61620101	Size S	100 Pcs
61620102	Size M	100 Pcs
61620103	Size L	100 Pcs
61620104	Size XL	100 Pcs

#### **POWDER FREE**

CODE	DESCRIPTION	QUANTITY
61629903	Size XS	100 Pcs
61629900	Size S	100 Pcs
61629901	Size M	100 Pcs
61629902	Size L	100 Pcs
61623004	Size XL	100 Pcs





## **STERILE SURGICAL GLOVES**

#### **POWDERED**

CODE	DESCRIPTION	QUANTITY
61624002	Size 6	50 Pcs
61624003	Size 6,5	50 Pcs
61624004	Size 7	50 Pcs
61624005	Size 7,5	50 Pcs
61624006	Size 8	50 Pcs
61624007	Size 8,5	50 Pcs
61624008	Size 9	50 Pcs





#### **POWDER FREE**

CODE	DESCRIPTION	QUANTITY
61625501	Size 6	50 Pcs
61625502	Size 6,5	50 Pcs
61625503	Size 7	50 Pcs
61625504	Size 7,5	50 Pcs
61625505	Size 8	50 Pcs
61625506	Size 8,5	50 Pcs
61625507	Size 9	50 Pcs







CODE	DESCRIPTION	QUANTITY
00011030	1 MI Central Needle 25 G (0,50mmx16mm)	100 Pcs
00111025	1 MI Central Needle 26 G (0,45mmx16mm)	100 Pcs
00111020	1 MI Central Needle 27 G (0,40mmx13mm)	100 Pcs
00251045	2,5 MI Central Needle 22 G (0,70mmx32mm)	100 Pcs
00511045	5 MI Central Needle 22 G (0,70mmx32mm)	100 Pcs
01001045	10 MI Central Needle 22 G (0,70mmx32mm)	100 Pcs



CODE	DESCRIPTION	QUANTITY
02002065	20ml Eccentric Needle 18g (1,20mmx38mm)	50 Pcs
30020000	30ml Without Needle Eccentric Luer Cone	40 Pcs
30030000	30ml Without Needle Luer Lock Cone	40 Pcs
05002000	50ml Without Needle Eccentric Luer Cone	25 Pcs
05003000	50ml Without Needle Luer Lock Cone	25 Pcs
05000000	50/60ml Without Needle Catheter Cone	25 Pcs



## FOQUS TNT SPUNLACE ROLL






## **FEATURES**

- · Ideal for surgical field
- · Resistant material

CODE	DESCRIPTION	QUANTITY
00006733	100x50 mt	1 Pcs
00006734	120x50 mt	1 Pcs



## **DECONTAMINATION MAT**



FOQUS decontamination mat is a multilayer decontaminating mat used in all environments that require the total absence of contaminating agents and the preservation of high hygiene levels."



#### **FEATURES**

- · Antibacterial adhesive
- 30 numbered disposable layers
- Easy and safe removal of used layers without risk of ripping or hand contact
- Dimension 115x60 cm



## FOCUS FOSCHI QUALITY SOLUTIONS


## **S STANDING AUTOMATIC GEL DISPENSER**



#### **FEATURES**

- Liquid Gel Dispenser 1 Lt:
  - Dispenser for liquid sanitizing gel for hands, entirely in abs with removable key lock, photocell and automatic dispensing30 numbered disposable layers
- Stand for gel dispenser:
  - 1,5 mm thick powder coated metal stand for GEL dispensers. dim.130x30x13 cm



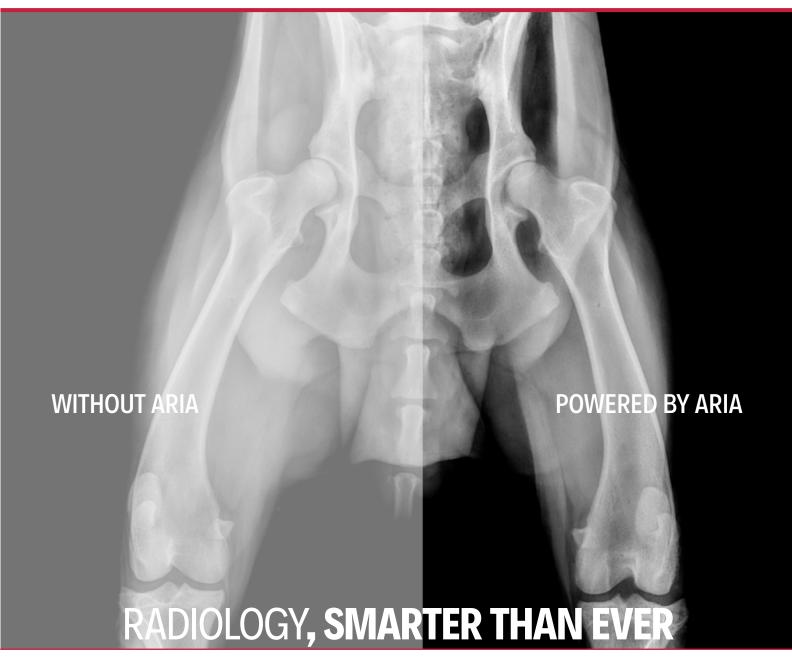

## **DIGITAL X-RAY**



# A COMPLETE PORTFOLIO OF RADIOLOGY PRODUCTS DESIGNED AND DEVELOPED IN ITALY BY FOSCHI

**ARIA** stands for "Andvanced Resources for Images and Applications" and is a complete radiography product line.

**Digital Radiography solutions** are as individual as veterinary practices, and this is why ARIA offers a wide range of solutions for all your X–ray needs, from Computed Radiography (CR) to Digital Radiography (DR) and Digital image management.

**HARDWARE**: all of our hardware is designed with the manufacturer or sourced from the world's leading imaging providers. It is reliable, but in case of breakdown we offer an extensive technical service and different maintenance options.

**SOFTWARE**: the center of all ARIA solutions is the inhouse developed software which allows the Vet to control, manage and archive all processes related to the digital X–ray processes. The ARIA software was developed with Vets for the Vet, in order to offer a technology that is built to perform in the demanding environment of the Veterinary professionals.

#### BE **SMART.** BE **ARIA®**

- → MORE THAN 1000 OPTIMIZATION ALGORITHMS
- > STARTING THE SOFTWARE IN LESS THAN 3 SECONDS
- → DEDICATED VETERINARY MEASUREMENTS

- → INTEGRATED REPORTING SYSTEM
- → FUNCTIONS STANDARD DICOM
- > NEW RADIOGRAPHIC REGISTER

## YOUR IMAGES IN JUST 3 CLICKS





## **DR SOLUTIONS**

## FLAT PANEL ARIA 3543 DR

## **OPTIMAL ERGONOMICS & UNLIMITED FLEXIBILITY**






The **ARIA DR** product range is synonymous with high performance and reduced exposure and the latest product in the line, the portable **ARIA 3543 DR**, features the most state-of-the-art performance levels of any portable flat panel detectors on the market.

Produced by the Leading French Company, **THALES**, this flat panel weighs only 3,1 kg and features a unique borderless design for **extreme mobility** and flexibility. This last generation panel can be used either in wired mode, inside the bucky tray, but is also wifi–enabled and can therefore be removed to ensure versatility for all exam types and maximise your workflow from the x-ray room, to the surgery room or ICU.

With its 35x43 "cassette-size", the detector fits into any standard bucky tray on the market. When positioned inside the bucky tray, the panel operates in wired mode through the magnetic power cable, while charging the battery. In case of disconnection of the magnetic cable, the panel self-configures in Wi-Fi mode for use in other environments.

Code	00005642	
Detection Area	35x43 cm	
Scintillator	Csl	
Connection	Wi-Fi e Cable	
Dimensions (W x L x D)	383.5 x 459.5 x 15.0 mm	
Pixel	2156x2664	
Pixel Pitch	160 µm	
AD conversion	16 bit	
Dqe @ 0 Lp/Mm_2 μgy	> 70%	
Acquisition time	< 3 sec	
Storage mode	YES	
Weight	3,1 kg	

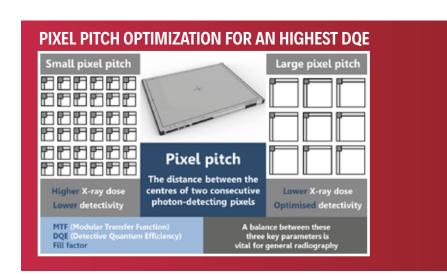


## **FLAT PANEL ARIA 2430 DR**

## 10X12" WIRELESS



Made in UE







#### **ARIA 2430 DR** CONFIGURATION

- Tablet 15" with Ultra HD resolution Surface Pro Book powered by Microsoft
- High capacity long life battery 11 hours
- Router with 5 GHz Wi-Fi and 4G capability
- Ultra light mobile holder included









## **ARIA 8020 HF**

## MEETING NEW EXPECTATIONS FOR MOBILE EQUINE RADIOLOGY

The ARIA 8020 portable generator is the ideal solution to meet the needs of the equine practitioner.

This portable generator combines an extremely low weight with optimum handling.

The high power output of 1,6 kW guarantee high performance with stifle, cervical and spine's images of the horse.

Code	00003855
Outroot	20mA@50-80kV (0.02 - 0.10 sec.)
Output	15mA@50-80kV (0.11 - 2.0 sec.)
Timer	0.02-2.00 sec
AC Input	230V (50/60Hz)
Size	W 182mm × H 157mm × L 299mm
Focal Spot	0.8mm
Total filtration	3.0mm Al equivalent
Memory storage	5 presets
Laser pointer	Dual laser
Size	W182mm×H157mm×L299mm
Weight	6.40 kgs



## **CR SOLUTIONS**

## **CR VITA FLEX**

DR Imaging Made Affordable: upgrade to the Digital Detector designed with a Vet's needs in mind.

CARESTREAM Vita Flex CR Systems are designed for small—to—midsize veterinary hospitals, clinics and practices that need compact digital solutions at an affordable price. With two options for throughput speed, Vita computed radiography systems offer in—house, high—quality digital imaging to fit your workflow. The flexible orientation ma—kes it perfect for small spaces in offices or in mobile settings.

#### **FEATURES**

- Weight: 25 kg
- Dimensions (W x D x H): 68 x 34 x 45 cm
- Overall Size: 0,30 mg
- Resolution: 11,6 px/mm
- Tempo d'avvio: 15 secondi

#### **NOISE LEVEL**

- Noise Level while Operating: below 58 dBA
- Noise Level during Loading Period: inferiore a 70 dBa

#### **ERASE SPECIFICATIONS**

- Erase Range: 0 < 40 mr
- Erase Time: 7 < 80 sec. (in relazione ai tempi di esposizione)



#### SUPPORTED CASSETTE SIZES AND SPECIFICATIONS

CASSETTE SIZE	CODE	PLATI	E SIZE	PIXEL PITCH
		X	Υ	μm
35 x 43 cm	00721143	354	430	86
24 x 30 cm	00721141	252	304	86
18 x 24 cm	00721112	220	252	86

#### **SELF-REPAIR FEATURE**

- Fast self-repair maximizes uptime and budget
- Fix it yourself with three easy, self-replaceable units
- Or, call for full-service from a certified technician



## FlexFit Means There Are Two Ways to Save Space.

Vita Flex's benefits for small offices don't end with its compact footprint. You can find the fit that's best for you. Vita Flex fits on a tabletop, desktop, sitting on the floor or in the back of a van. You can position it in a traditional horizontal configuration, or set it up vertically if that's a better fit for your space.

#### Now that's flexibility.

## **ARIA 450 GENERATOR** with 4-way floating table

#### Produced and designed in Italy by Foschi

From our passion and continuous research in the Imaging Veterinary Field, we have developed the newest product of the ARIA range: the ARIA 450 Radiographic Generator. The ARIA 450 is the first generator produced in Italy by Foschi in collaboration with the major imaging providers. A perfect blend of Italian technology and design, with high power and stability, able to face the demanding needs of today's veterinary practices.

The 32 kW generator is able to produce a maximum output of 450 mA and a power of 125 kV. The new inverter with working frequencies from 100 kHz is able to guarantee stability and reliability of the x-ray emission delivering highest image quality, while avoiding repetitions and unnecessary exposure of the patient.

The graphical user interface has been revisited and is even more intuitive and simple. You can choose between over 1,000 presets for 11 different species: by choosing the anatomical width or the size of the breed, ARIA will load the ideal exposure for the highest image quality with the lowest dose.






- Max Current 450 mA
- Max Voltage 125 kV
- Max Power 32 kW
- Working Frequency 100 kHz
- kV Range 40 125 (1 kV step)
- mAs Range 0,5 150
- Focal Spot 0,6 / 1,3 mm
- Touch Screen with Anatomical Preset
- Doses for 11 Different Species
- More than 1000 Preset
- 2 and 3 Points Technique
- Thickness Dose Manager
- Compact Collimator with Low Leakage
- 4 Way Floating Table
- Quiet Mechanical Brake




X-RAY GENERATOR

ARIA 450 - 450/125 H.F.



CODE 00004659



## **ACCESSORIES**



CODE

DESCRIPTION

00721338 0.50 mm lead equivalence – 120 cm



## **Thyroid Protector**

CODE

DESCRIPTION

00673223

Thyroid Shield – 0.5 mm lead equivalence



## X-Ray Mittens 0.50 mm

CODE

DESCRIPTION

00407018

Gloves 0.50 mm lead equivalence



## **Eye Protection**

CODE

**DESCRIPTION** 

00842017

Eyewear - front and side protection



X-Ray Foam Positioners

## Portable generator holder

CODE

DESCRIPTION

00500986

Portable generator holder



DESCRIPTION

00002658 00002659

Circular block - big 25 x 20 x 11 cm Circular block - small 11,5 x 20 x 6 cm

Rectangular block - 25 x 20 x 7 cm

Positioning block with hole – 20 x 7,5 x 7 cm

00002655 00002657

CODE

Cylinder bolster - 11 x 25 cm

00002656 00002660

Positioning block - 20 x 5 cm





## THE EVOLUTION OF ADVANCED 3D VETERINARY IMAGING

NewTom 5G XL, a CBCT device incorporating unique technology, guarantees advanced top—level diagnostics by maximising patient stability and providing a broad selection of FOVs, resulting in 3D and 2D images of the very highest quality.

CBCT technology combines low X-ray doses with high spatial resolution: the outstanding quality of 5G XL images lets veterinary specialists identify pathologies and fractures that would otherwise be unidentifiable. Patient health – enhanced by the ECO Dose mode and exclusive SafeBeamTM technology – is a key design priority.

The native 21 x 19 cm FOV and numerous smaller high resolution FOVs constitute a 'toolbox' that is perfect for veterinary diagnostics, which demand sharp, extremely detailed images.





#### SUPERIOR DIAGNOSTIC QUALITY

Very high resolution 3D and 2D images and a broad range of FOVs make the device suitable for a vast selection of clinical applications.



#### **MOTOR-DRIVEN PATIENT TABLE A CBCT**

system with an open gantry and motor-driven patient table allows remote-controlled patient positioning, ensuring stability and fast completion of examinations.



#### MINIMUM TIMES, MAXIMUM USER-FRIENDLINESS

Minimum scan times and automatic calculation of X-ray doses ensure fast acquisition of detailed images and maximum diagnostic capacity.



#### **VETERINARY SOFTWARE**

The dedicated interface lets users display images and access innovative 3D and 2D analysis functions for fast, accurate diagnoses and optimal workflow.





#### 360° RECONSTRUCTION

The 360° scan acquires the entire volume with a single rotation. 5G XL rapidly generates a complete dataset of axial, coronal and sagittal images as well as 3D renderings.



#### **ECO SCAN**

Emissione di raggi x ridotta fino a 0,9 secondi nel caso di esami standard. Il protocollo ECO Scan è l'ideale per controlli post-operatori e analisi di macro strutture.



#### **EXTRA FOV VISION**

The eXtra FOV function lets users examine large anatomical districts longitudinally (Ø15 x 22 cm). The availability of multiple 3D FOVs, from a minimum of Ø6 x 6 cm to a maximum native FOV of Ø21 x 19 cm, for optimised image acquisition.



#### **SAFEBEAM™**

Exclusive SafeBeam™ technology eliminates the risk of exposing the patient to an unnecessarily high dose by automatically adapting radiation levels to the patient's anatomical FEATURES.



#### **HIRES ANALYSIS**

The ultra-high spatial resolution of 5G XL returns extremely clear, detailed images, allowing for the clear display of micro-fractures and micrometric anatomical details.




#### RAY2D


The Ray2D function lets users perform a preliminary low dose 2D X-ray examination; if necessary, this can be followed by a high resolution 3D examination of the specific area of interest for further in-depth diagnostics.












## **DENTAL RADIOLOGY**


## **ARIA DentalRay**

## HIGHER PERFORMANCE AND MAXIMUM ERGONOMICS



Thanks to the protractor with graduated scale, arm and tube head positioning is stable, effective and just right for the task. Made of extruded aluminium and featuring an integrated self-balancing device, allowing them to be pointed in 6 directions and making installation as simple as possible.






Increased X–ray parallelism and an incorporated collimator allow the ARIA DentalRay to achieve a source–to–skin distance of 30 cm, providing pin–sharp, precise images with outstanding detail.



#### **USER-FRIENDLY CONTROL**

A practical, user–friendly handheld unit, designed for immediate, pre– cise X–ray image acquisition, allows easy selection


of the most suitable programme. Moreover, it allows users to control the exact emitted dose and the tube temperature via the sequential exposure graph.

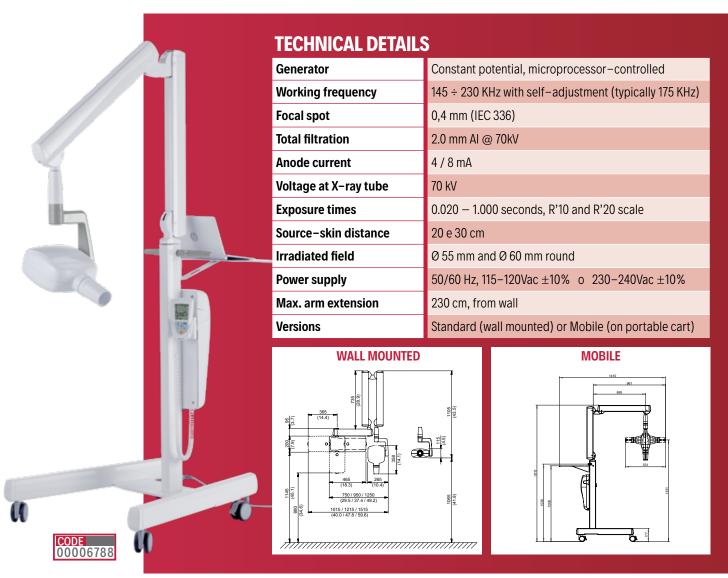

## **ARIA X-HD**

## **ALWAYS READY, FAST, PORTABLE**

ARIA X–HD means real–time diagnostics, direct USB plug–and–play connection, high definition and immediate results. The sensor uses NNT, the all–in–one software ideal for diagnostics, communication and management of intraoral veterinary imaging in perfect synchronism with any other device already in the surgery.

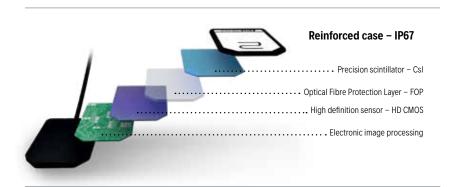



Five—layer technology, for high—contrast images and precision detail. Cesium lodide (Csl) scintillator made up of column—like micro—structures that preserve image quality; it first intercepts the X—ray beam and converts it into visible light. The fibre optics layer (Fibre Optics Plate) collimates the radiation onto the sensor and protects it against direct X—ray penetration. The third layer (CMOS HD) is the acquisition device which converts the light into a digital image with 16,384 grey levels. The fourth layer pre—proces—ses the image and converts it into a USB signal. The last layer has a protective function.

TECHNICAL DETAILS	CODE	CODE	
External dimensions (mm)	38,9 x 24,9	41,9 x 30,4	
Thickness (mm)	5,3	5,7	
Pixel matrix	1500 x 1000	1700 x 1300	
Pixel size (µm)	20	20	
Maximum resolution (lp/mm)	25	25	
Grey levels depth	14-bit acquisition – 16384 maximum grey levels		
Scintillator technology	Csl (Cesium lodide) with micro-columnar structure		
Direct exposure protection	FOP (Fibre Optics Plate)		
Protection rating	IP 67 (Guaranteed against liquid or dust infiltration)		
Connectivity	Direct USB to PC		
Image management software (for PC)	NNT (for PC) with DICOM 3.0 interface with free viewer and APP for iPAD		
Supported operating systems	Windows® 7 (SP1) - 8 - 10 (64 bit)		
Display settings	1344 x 768 or greater, 16 million colours		
Port	USB 2.0 or subsequen 5 VDC, 500 mA (via US		



#### **DUAL FORMAT**

ARIA X-HD is equipped with a sensor, available in two sizes, ergonomic and with smoothed edges, which adapt it to the anatomy of the patient's oral cavity, guaranteeing outstanding positioning comfort.

Reduced dimensions and a maximum active area ensure advanced X-ray diagnosis.



## **ARIA IN THE WORLD**



Since 2014, we have expanded our business on the international front: today we count **over 10 international partners** that distribute ARIA x-ray systems and Foschi products and we seek to maintain constant growth based on expansion into new markets through exclusive Distributors and an improved presence in current markets.

Foschi's goal abroad is to offer its international partners the excellence of its products and the knowledge and support of its product specialists, as for **ARIA**. **ARIA** stands for **Advanced Resources for Imaging and Applications** and is Foschi's complete digital radiography product line. Today ARIA counts over 700 installations worldwide and is a proud global sponsor of ISELP (International Society for Equine Locomotive Pathology) and VetPD for continuing education.





For Information call +39 06 417 905 800 or send an email to orders@foschigroup.com or visit www.foschigroup.com







## THE FIRST LINE OF ENDOSCOPES MADE IN ITALY

The choice of innovative materials elevates us to new and improved quality standards.



**ARIA NiTiFlex v2.85** Video Endoscope provides excellent diagnostic quality, which is obtained via a state-of-the-art **Full HD 1080p** output CMOS sensor. This technology guarantees a high resolution image with spectrometrically calibrated colours and it is able to accurately replicate various typologies of organic tissues.

The handle has been tested and designed to be extremely ergonomic, in order to optimise usability of transendoscopic accessories, facilitate handling and minimise weariness during standard utilisation.

With **850mm of working length** and 2,8mm of external diameter, the insert is coated with a biocompatible material—sheath made of **Nitinol**, a Nickel and Titanium shape memory alloy characterised by excellent resistance and flexibility. The choice of these innovative materials allows a wide working channel of 1,2mm and a **distal angulation (up/down) up to 270°.** 


The combination of all these FEATURES is what makes ARIA NITIFIEX v2.85 Endoscope absolutely unique.





## **DEEPVIEW VIDEO PROCESSOR**

By connecting the Video Endoscope EndoFlex v2.85 to the Video Processor MP-DEEPVIEW RGB LED, you can access a powerful, next-generation LED lighting system, paired with an optical filter switch that allows vision on three different depth levels. Therefore, this system enables early diagnosis and identification of the margins of injuries.

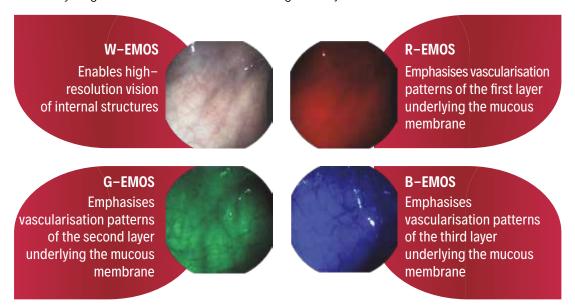

#### **FEATURES**

	Output video signal	HDMI
	Image enhancement	Spectrometrically calibrated colours Automatic border enhancement Automatic range selection
	Brightness correction	Incremental with potentiometer 0-100 (%)
Observation	Colour filters	Optical enhancement of the morphological structure of the mucous membrane to reveal up to three depth levels of tissue (selectable through switch on processor)
	White balance	Dedicated button on processor
	Multifunction button	Selectable function between Gain and Enhance
D	Power supply	~110V/220V AC (±10%)
Power Frequency		50Hz/60Hz
Noise	dB	< 52
1:	Bulb	LED
Light	Colour temperature	≥ 5500K





## NITIFLEX v 2.85



I Video Endoscopi **ARIA NiTiFlex** sono dotati di un'eccellente qualità diagnostica, ottenuta grazie ad un sensore CMOS di ultima generazione con uscita in **Full HD 1080p** che garantisce un'immagine ad alta risoluzione e con colori spettrometricamente tarati, in grado di riprodurre fedelmente.



#### **CARATTERISTICHE**

Codice	00007366
Lunghezza operativa	850 mm
Diametro esterno	2,85 mm
Canale operativo	1,2 mm
Movimenti	up 270°/down 270°
Fibre luce	2



- → SEZIONE ESTERNA DA 2,8 mm
- → CANALE OPERATIVO DA 1,2 mm
- → CANALE OPERATIVO DA 1,2 mm

## NITIFLEX v 4.4



I Video Endoscopi **ARIA NiTiFlex** sono dotati di un'eccellente qualità diagnostica, ottenuta grazie ad un sensore CMOS di ultima generazione con uscita in **Full HD 1080p** che garantisce un'immagine ad alta risoluzione e con colori spettrometricamente tarati, in grado di riprodurre fedelmente.

#### **CARATTERISTICHE**

Codice	00008294
Lunghezza operativa	850 mm
Diametro esterno	4,4 mm
Canale operativo	2,2 mm
Movimenti	up 180°/down 180°
Fibre luce	2





- → SEZIONE ESTERNA DA 4,4 mm
- → CANALE OPERATIVO DA 2,2 mm

## **OPTIONAL CAMERA FOR RIGID ENDOSCOPY**

The camera head provides excellent diagnostic quality, which is obtained via a state-of-the-art Full HD 1080p CMOS sensor (NATIVE). This technology guarantees a high resolution image with spectrometrically calibrated colours and it is able to accurately replicate various typologies of organic tissue.





C-mount attachment coupler for full compatibility with rigid optics



Next-generation Full HD 1080p CMOS sensor NATIVE (1920x1080), with HDMI digital output



Three customisable buttons with multiple functions, including Gain and Enhance



Ergonomic design to facilitate handling and minimise weariness of operator

## **RIGID ENDOSCOPES**

- + Saphire full HD glass on the distal end and ocular side
- + Autoclavable at 134° for 18 minutes
- + 'Made in Germany' quality





## **ARTHROSCOPES**

CODE	DIAMETER	LENGTH	DIRECTION OF VIEW
00007582	ø <b>1.9 mm</b>	60 mm	0°
00007583	ø <b>1.9 mm</b>	60 mm	30°
00007584	Ø <b>2.7 mm</b>	110 mm	0°
00007585	ø <b>2.7 mm</b>	110 mm	30°
00007586	ø <b>2.7 mm</b>	110 mm	70°
00007587	ø <b>2.7 mm</b>	140 mm	0°
00007588	ø <b>2.7 mm</b>	140 mm	30°
00007589	ø <b>2.7 mm</b>	175 mm	0°
00007546	ø <b>2.7 mm</b>	175 mm	30°
00007591	ø <b>2.7 mm</b>	175 mm	70°
00007592	Ø <b>2.7 mm</b>	187,5 mm	0°
00007593	ø <b>2.7 mm</b>	187,5 mm	30°
00007594	Ø <b>2.7 mm</b>	187.5 mm	70°



## **URETEROSCOPES**

CODE	DIAMETER	LENGTH	DIRECTION OF VIEW
00007598	Ø 1.5/2.2 mm	315 mm	5°
00007601	Ø 1.5/2.2 mm	430 mm	5°
00007599	Ø 2.0/2.5 mm	315 mm	5°
00007600	Ø 2.0/2.5 mm	315 mm	12°
00007602	Ø 2.0/2.5 mm	430 mm	5°
00007603	Ø 2.0/2.5 mm	430 mm	12°
00007604	Ø 2.7/3.2 mm	315 mm	12°
00007605	Ø 2.7/3.2 mm	430 mm	12°



## **LAPAROSCOPES**

CODE	DIAMETER	LENGTH	DIRECTION OF VIEW
00007590	Ø <b>2 mm</b>	300 mm	0°
00007614	Ø <b>2 mm</b>	300 mm	30°
00007595	Ø <b>5 mm</b>	300 mm	0°
00007388	Ø <b>5 mm</b>	300 mm	30°
00007596	ø <b>10 mm</b>	339 mm	0°
00007387	ø <b>10 mm</b>	341 mm	30°
00007597	ø <b>10 mm</b>	341 mm	45°



## **CYSTOSCOPES**

CODE	DIAMETER	LENGTH	DIRECTION OF VIEW
00007606	Ø <b>2.7 mm</b>	302 mm	0°
00007607	Ø 2.7 mm	302 mm	30°
00007608	Ø <b>2.7 mm</b>	302 mm	70°




## **OTOSCOPES**

CODE	DIAMETER	LENGTH	DIRECTION OF VIEW
00007609	ø <b>2.7 mm</b>	50 mm	0°
00007610	Ø 2.7 mm	50 mm	30°
00007611	Ø <b>4 mm</b>	50 mm	0°
00007612	Ø <b>4 mm</b>	50 mm	30°





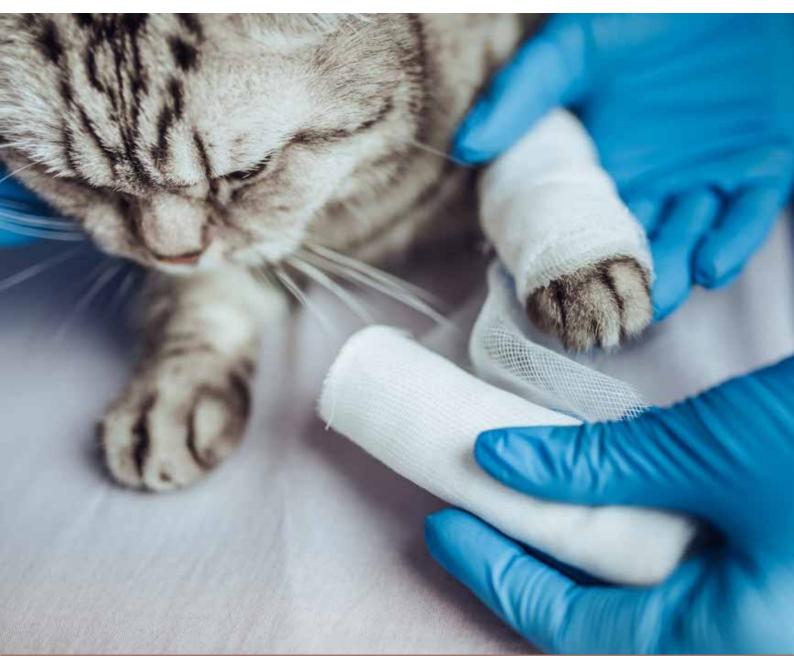

## **ORTHOPAEDICS**

## **FIRST LINE**

## Cannulated Drill



## **FEATURES**

- Integrated Jacob chuck
- · Battery service life up to 40 min
- · Reverse switch
- Autoclavable 134°C (273°F)
- Cannulation up to 3.5 mm
- Noise ≤ 40 db
- Speed 0-630 rpm
- Torque 3.3 N m
- Weight 1.400 gr (without battery)



## **ACCESSORIES** (on request)

- Battery charger (single slot) (code 00001197)
- Nickel-Metal Hydride Battery (NiMH) (code 00001196)
- Key for Jacobs chuck



## FIRST LINE Sagittal Saw





## **FEATURES**

- Monofunctional handpiece
- Battery service life up to 40 min
- Autoclavable 134°C (273°F)
- Noise ≤ 75 db
- Operation voltage 14.4 V
- Oscillations 0-15.000 osc/min
- Output power ≥ 90w
- Weight 1.400 gr (without battery)



## **ACCESSORIES** (on request)

- Nickel-Metal Hydride Battery (NiMH) (code 00001196)
- Battery charger single slot (code 00001197)
- · Stainless Steel Case



## **BLADES** (on request)

The saw base mounts a variety of saw blades with different thickness and lengths:

00603067	Blade for sagittal saw 9.5/0.5/41 mm (L/W/H)
00603065	Blade for sagittal saw 10/0.5/60 mm (L/W/H)
00603066	Blade for sagittal saw 14/0.8/70 mm (L/W/H)

## **GIULIUS LINE**

## Cannulated Drill



## **FEATURES**

- · Integrated Jacobs chuck
- Battery service life up to 40 min
- · Reverse switch
- Autoclavable 134°C (273°F)
- Cannulation up to 3.0 mm
- Noise ≤40 db
- Speed 0-600 rpm
- Torque 1 N m
- Weight 770 gr (without battery)



## ACCESSORIES (on request)

- Battery charger (single slot) (code 00003360)
- Nickel-Metal Hydride Battery (NiMH) (code 00003361)
- · Key for Jacobs chuck
- Autoclavable Stainless Steel Case (code 00603071)



# GIULIUS LINE Sagittal Saw Foschi

Lid





## **FEATURES**

- Battery service life up to 40 min
- Monofunctional handpiece
- Autoclavable 134°C (273°F)
- Noise ≤ 40 db
- Oscillations 0–15.000 osc/min
- Weight 770 gr (without battery)



## **ACCESSORIES** (on request)

- Battery charger (single slot) (code 00003360)
- Nickel-Metal Hydride Battery (NiMH) (code 00003361)
- Autoclavable Stainless Steel Case (code 00005190)



## **BLADES** (on request)

The saw base mounts a variety of saw blades with different thickness and lengths:



00003460	Blade for sagittal saw 7,5/0,5/35 mm (L/W/H)
00003459	Blade for sagittal saw 9,5/0,5/35 mm (L/W/H)
00003461	Blade for sagittal saw 14/0,5/41 mm (L/W/H)

## **PREMIUM LINE**

## Cannulated Drill

The unit is fully autoclavable. The motor is quiet, high speed and grants long service life. Can connect various flexible reamers and reaming change is simple and fast. The Nickel–Metal Hydride battery, lasts up to 50 minutes.



#### **FEATURES**

- · Integrated Jacobs chuck
- Battery service life up to 50 min
- Reverse switch
- Torque 6,5 N m
- Autoclavable 134°C (273°F)
- Cannulation up to 4.0 mm
- Noise ≤40 db
- Speed 0-1.000 rpm
- Weight 1.415 gr (with battery)



uest)

#### **INCLUDES**

- Battery charger (single slot) (code 00603077)
- Nickel-Metal Hydride Battery (NiMH) (code 00603076)
- Key for Jacobs chuck
- Stainless Steel Case for drill (code 00603079)



Battery compartment

## **PREMIUM LINE**

## Sagittal Saw

For cutting bone steadily and quickly during joint surgery, avoiding soft tissue damage. The unit is fully autoclavable. The motor is quiet and the Nickel—Metal Hydride battery lasts up to 50 minutes, allowing long service life.





## **FEATURES**

- Monofunctional handpiece
- Battery service life up to 40 min
- Autoclavable 134°C (273°F)
- Noise ≤ 40 db
- Oscillations 0-15.000 osc/min
- Weight 770 gr (without battery)
- Speed mode switch (Low-High)



## **INCLUDES**

- Battery charger (single slot) (code 00603077)
- Nickel-Metal Hydride Battery (NiMH) (code 00603076)
- Stainless Steel Case for saw (code 00005191)



## **BLADES** (on request)

The saw base mounts a variety of saw blades with different thickness and lengths:

00603067	Blade for sagittal saw 9.5/0.5/41 mm (L/W/H)
00603065	Blade for sagittal saw 10/0.5/60 mm (L/W/H)
00603066	Blade for sagittal saw 14/0.8/70 mm L/W/H)

## **EXOTIC MINIDRILLS**

## Electric Saw



## **FEATURES**

- Power 115 VA
- Frequency 50Hz
- Oscillations over 11.000 osc/min
- Noise ≤ 40 db
- Nickel-Metal Hydride Battery (NiMH)



## **Electric Drill**



#### **FEATURES**

- Power 115 VA
- Frequency 50Hz
- Speed 1000 rpm
- Noise ≤ 40 db
- Nickel-Metal Hydride Battery (NiMH)







## **ACCESSORIES** (on request)



Battery



Charger



Drill Bit

**Button** 

Slocum attachment

## **FURIUS TPLO SAW**



#### **FEATURES**

- · Monofunction handpiece
- Autoclavable 134°C (273°F)
- Noise ≤ 75 db
- Oscillations 0-16.000 osc/min
- Battery service life up to 40 min
- Length 290 mm
- Diameter 55 mm
- Weight 900 gr (without battery)



## **ACCESSORIES** (on request)

- Nickel-Metal Hydride Battery (NiMH) (code 00003928)
- Battery charger single slot (code 00003927)
- Stainless Steel Case (code 00003929)



## **TPLO BLADES** (on request)

00006157	Slocum TPLO Blade 8 mm
00004389	Slocum TPLO Blade 10 mm
00004388	Slocum TPLO Blade 12 mm
00003923	Slocum TPLO Blade 15 mm
00001198	Slocum TPLO Blade 18 mm

00003924	Slocum TPLO Blade 21 mm
00001199	Slocum TPLO Blade 24 mm
00003925	Slocum TPLO Blade 27 mm
00001200	Slocum TPLO Blade 30 mm
00004909	Slocum TPLO Blade 33 mm



00003926

Lid

# **MULTIFUNCTION DRILL** F2016



## **FEATURES**

- Multifunctional handpiece
- Autoclavable 134°C (273°F)
- Noise  $\leq$  75 db
- · Reverse switch
- Battery service life up to 40 min
- Weight < 1 kg (with battery)



## **ACCESSORIES** (on request)

- Nickel-Metal Hydride Battery (NiMH) (code 00001196)
- Battery charger single slot (code 00001197)
- Key for Jacobs chuck



## **DRILL ATTACHMENTS** (on request)

#### **JACOBS ATTACHMENT**



- Speed 0-1.000 rpm
- Torque 2.9 N m

CODE 00001171

## CANNULATED JACOBS ATTACHMENT



- Speed 0-630 rpm
- Torque 3.3 N m

CODE 00001172

#### **AO DRILL ATTACHMENT**

- Speed 0-1.100 osc/min
- Torque 3 N m

CODE 00001194

#### SAGITTAL SAW ATTACHMENT



• Speed 0-15.000 osc/min

CODE 00001170

#### **TPLO ATTACHMENT**



• Speed 0-15.000 osc/min

CODE 00001195

#### TPLO BLADES

II LO DEA	DLO
00004389	Slocum TPLO Blade 10 mm
00004388	Slocum TPLO Blade 12 mm
00003923	Slocum TPLO Blade 15 mm
00001198	Slocum TPLO Blade 18 mm
00003924	Slocum TPLO Blade 21 mm
00001199	Slocum TPLO Blade 24 mm
00003925	Slocum TPLO Blade 27 mm
00001200	Slocum TPLO Blade 30 mm
00004909	Slocum TPLO Blade 33 mm

# **MULTIFUNCTION DRILL** FURIUS



## **FEATURES**

- Multifunctional handpiece
- Autoclavable 134°C (273°F)
- · Reverse switch
- Noise ≤ 45 db
- Battery service life up to 40 min
- Weight 550 gr (without battery)



## **ACCESSORIES**

- Nickel-Metal Hydride Battery (NiMH) (code 00001196)
- Battery charger single slot (code 00001197)
- · Key for Jacobs chuck



## **DRILL ATTACHMENT**

#### **JACOBS ATTACHMENT**



- Speed 0-1.000 rpm
- Torque 0.9 N m

CODE 00003356

## CANNULATED JACOBS ATTACHMENT



- Speed 0-460 rpm
- Torque 1 N m

CODE 00003358

#### **AO DRILL ATTACHMENT**



- Speed 0-1.100 osc/min
- Torque 0.9 N m

CODE 00003357

#### SAGITTAL SAW ATTACHMENT



• Speed 0-15.000 osc/min

CODE 00003355

#### K-WIRE DRILL ATTACHMENT

Available in 2 versions:
 0.8 – 2.0 mm (code 00003359)
 2.0 – 3.0 mm (code 00003436)

- Speed 0-1.100 rpm
- Torque 1 N m



## **JACOBS DRILL BITS**

00603042	Jacob attachment Ø 1.1 mm, length 115/35 mm
00603043	Jacob attachment Ø 1.5 mm, length 115/35 mm
00603044	Jacob attachment Ø 1.8 mm, length 115/35 mm
00603045	Jacob attachment Ø 2.0 mm, length 115/35 mm
00603046	Jacob attachment Ø 2.5 mm, length 115/50 mm
00603047	Jacob attachment Ø 2.7 mm, length 115/50 mm





## **AO (RAPID) DRILL BITS**

00603048	AO (rapid) attachment Ø 1,1 mm length 125/25 mm
00603049	AO (rapid) attachment Ø 1,5 mm length 100/35 mm
00603050	AO (rapid) attachment Ø 1,8 mm length 125/25 mm
00603051	AO (rapid) attachment Ø 2,0 mm length 125/30 mm
00603052	AO (rapid) attachment Ø 2,5 mm length 150/45 mm
00603053	AO (rapid) attachment Ø 2,7 mm length 125/50 mm

## MICROMOTOR FOR SPINAL SURGERY

High power and easy to use micro-surgical power tool for a wide range of applications in neurosurgery (spine, brain, trauma). Attachments can be assembled and disassembled rapidly and are 134° C/273° F autoclavable.



#### **FEATURES:**

- Touch screen power console AC110V-220V (code 00603040)
- Electric handpiece
- Angled attachment (1.000–100.000 rpm)
- Sagittal saw attachment (0–15.000 rpm)
- Pedal switch (code 00603040)

#### **BLADES FOR SAGITTAL SAW** (on request):



Blade 18/5/0.5 mm



• Blade 21/7/0.5 mm



• Blade 28/5/0.5 mm

#### **BURRS FOR ANGLED ATTACHMENT (on request):**



00603033

• Rosen burr 2x70 mm



Rosen burr 3x70 mm



• Rosen burr 4x70 mm





Electric handpiece





Angled attachment





Sagittal saw







IMAGE RESOLUTION **8MP** 

FOCUS Autofocus – Manual

CAMERA COLORED SENSITIVE TO INFRARED (NIR)

# **OPHTHALMOLOGY**

#### **DRY EYE**

# SBM ICP OSA-VET - Ocular Surface Analyser

Made in Italy

The Ocular Surface Analyser (OSA) is an excellent device for simplifying the dry-eye diagnosis procedure with clear, well-designed software presentation. The OSA can quickly determine which type of dry eye disease is present which allows the user to determine which treatment to provide.

The OSA easily and efficiently integrates the following complex examinations, providing the user with an easy to use 'traffic light' results report:

- Meibography imaging
- Blepharitis imaging
- Non Invasive Break up Time (NIBUT)
- Lipid Layer evaluation
- Tear Meniscus Height



#### **OSA-VET MEIBOGRAPHY**

Meibography allows to evaluate the morphology and drop out of the meibomiar glands and to make the diagnosis of Meibomian Gland Dysfunction (MGD). The software allows to analyze the functional and non functional areas, and to evaluate the extension of the affected area.

# **FEATURES**

IMAGE RESOLUTION	5 mp
<b>ACQUISITION MODE</b>	Multi shot, video
FOCUS	Autofocus, manual focus
ISO MANAGEMENT	Variable
GRIDS	Placido disc, NIBUT grid
CAMERA	Coloured, sensitive to infrared (NIR)
LIGHT SOURCE	Infrared LED — Blue and white Led
OPERATIVE SYSTEM	For Windows System






#### ICP OSA-VET DRY EYE ANALYSIS

OSA-Vet is an instrument available to veterinary ophthalmologists to evaluate the composition and stability of the Precorneal Tear Film (PTF). It allows to better evaluate PTF qualitative deficiencies and make an accurate diagnosis of evaporative Dry Eye Disease (DED) due to imbalance of the three main PTF components:

- Lipids
- Aqueous
- Mucins

Thanks to OSA-Vet it is possible to identify the type of DED, determine which deficient layer is affected and select a specific treatment.





## **ICP TEARVET-A (Tear Film Analyser)**



## **FEATURES**

**Tear film lipid layer examination**—The scattered light emitted by the Tearvet—A system allows to evaluate the interference patterns of the tear film Lipid Layer (LL). The different patterns can be classified according to LL thickness and quality. By examining the LL it's possible to detect lacrimal abnormalities and make a correct diagnosis.

TYPOLOGY	Tear Film diagnosis
IMAGE RESOLUTION	From 8 to 12 mp
ACQUISITION MODE	Multi shot, tube
FOCUS	Autofocus, manual focus
ISO MANAGEMENT	Variable
MAGNIFICATION	4x to 8x magnification with change via software
GRIDS	Placido disc, NIBUT grid
FILTERS	Yellow filter
LIGHTING	White led – Blue led
OPERATIVE SYSTEM	For iPad II, iPad, iPad Pro



ORGNOSTIC TIME

# **SBM** ICP MGA-VET (Meibomian Glands Analyser-Vet)



#### **FEATURES**

- Imaging & Automated Analysis of Meibomian Glands;
- Diagnosis of Meibomian Gland Dysfunction a leading cause of Dry Eye Disease;
- Simple fast acquisition and advanced recognition software;
- Quantifies Meibomian Gland percentage loss;
- Light weight portable device or Slit Lamp mounted;
- · For use with an iPad.

TYPOLOGY	Device for evaluation of the meibomian glands
CAMERA	Sensitive to infrared (NIR)
RESOLUTION	8 MPx
LIGHT SOURCE	Infrared LED
PART EXAMINED	Upper and lower eyelids
RATING	Calculation of the percentage of functional glands in the selected area and of the missing glands
GRAPHIC RESULT	Points out with color the areas with and without glands
TOOLS	Editor to highlight the area of the glands to be evaluated
OPERATIVE SYSTEM	For iPad – For Windows System





# • COMPARATIVE TABLE •







# Keeler


## VANTAGE PLUS LED indirect ophtalmoscope




The LED cooler color temperature provides brighter illumination, longer battery life, and freedom from purchasing bulbs. The LED life expectancy is up to 10,000 hours. Clinically, the superior optics combined with the LED illumination could provide greater detail, allowing you to find retinal pathology that wasnot visible with the xenon bulb BIO's

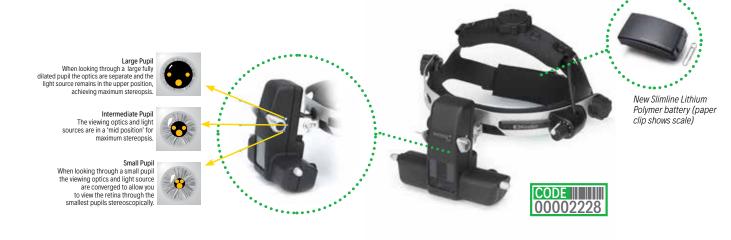









# **KEELER® Practitioner Ophtalmoscope 3.6V**

(Not available in 🛰 and 🔨)

The Keeler line of Direct Ophthalmoscopes have been designed to ensure ultimate control. Lenses, graticules and filters can all be introduced at the touch of a fingertip. No need to pull away from the patient, the Keeler Direct Ophthalmoscopes make routine examinations far easier.



- · Head and handle
- Lens range up +40D to -25D
- Filters: Red free Blue Slit
- · Rapid chargment in 2 hours



FINHOFF TRANSILLUMINA-TOR 3.6V (HEAD ONLY)





00000100

# **KEELER® PSL Classic Portable Slit Lamp**

(Not available in see and see )

Advanced optics, 10x & 16x magnifications Top quality multi layered glass is crafted into our Keeler multi–element and multi–layer coated optical system to give maximum performance.

Big Slit Lamp features, Portable usability Unique features such as the fixation targets, and the 1mm square light patch for assessing a/c flare set the new standard for Portable Slit Lamps.

Comes with alluminium carrying case.



00002227



Filter wheel Red free, Blue, Neutral density (0.8) and Clear





Slit wheel **O O O O** O



#### **ALSO AVAILABLE**



Psl spare battery



Psl led bulb

# **KEELER®** Mini Loupes

(Not available in see and see )

Mini Loupes are designed to be ultra light and comfortable with minimal compromise in field of view. Absolute comfort is our achievement; excellent peripheral vision is the added benefit of our slim design.



#### **FEATURES**

- Work distance from 42 to 46 cm
- Magnification from 2.0x to 5.5x
- 34000 LUX LED power



#### **ALSO AVAILABLE**

- Mounting system regular fit/standard temple black CODE 00002382
- Headband Keeler for Loupes
   CODE 00002230
- New k-led with 1 battery and charger tray CODE 00002231
- XI advantage loupe 3.5X/42cm
   CODE 00002972





#### **SUITABLE FOR:**

- Opthalmology
- Orthopaedics
- ENT

00002972

- Urology
- Obstetrics & Gynaecology
- General Dentistry





# **LIGHTING**





Made in Italy

#### SURGICAL AND MEDICAL EXAMINATION LIGHTING SYSTEMS

Quality lighting is essential for every operating room. FOSCHI partners with Rimsa to offer a variety of high-quality LED surgical lights and medical examination lights to meet the needs of today's veterinary operating rooms and exam rooms. FOSCHI surgical lights and examination lights deliver pure white light that enhances deep saturated reds and colors, minimizes shadows and uses less heat, saving energy.

## **VEGA AND ANTARES**

VEGA & ANTARES are a concentration of unparalleled performance technology, the best for a lamp for ambulatories and minor surgery. Their compact dimensions and extremely handy structure are permeated by the strong determination of Rimsa heart, a synonym of high technology, quality and performance ever since. The thin dome with two convenient side grips ensures easier positioning and adjustment and reduces overall dimensions.

#### **ANTARES**



• Light intensity mt.1: 100.000 lux • Color temperature: 4.500 K

• Diameter of the reflector: Ø 400 mm



## **VEGA**



• Light intensity mt.1: 120.000 lux • Color temperature: 4.500 / 5.000 K

Manual regulation of focus

• Diameter of the reflector: Ø 400 mm





5			
0	-	MY.	

	Ma .	
0 4	9	



	Mobile version	Wall version	Ceiling version
ANTARES	00005681	00005680	00005682
VEGA	00005685	00005683	00005684

## **SIRIO**

SIRIO is a surgical lamp with excellent operating versatility. The dome is reduced in size, the focus and the light field can be manually adjusted by turning the central sterilisable handle. This function allows to optimize the light flux and adapt the light field diameter according to the different surgeries.





Light intensity mt.1: 130.000 luxColor temperature: 4.200 k

• Diameter of the reflector: Ø 400 mm













# **EQUIPMENT**

# Foschi S CLASSIC STERILIZER 17 LT AND 22 LT



Made in Italy

The B Classic makes work easier by optimising times and costs. High-level quality and functions guarantee safety, reliability and ease of use. Thanks to the same external dimensions and LCD display, B Classic is a perfect solution for everyone.





#### **MODULAR TRAY HOLDER**



Allows to make the most of the autoclaving chamber thanks to its circular shape it is able to exploit the whole cylinder of the boiler, increasing the useful space available inside the chamber.

> CODE 00005634





The LCD display provides a steady stream of useful information on

**SIMPLE TO USE** 

## **CONSTANT MONITORING**



The LCD display provides a steady stream of useful information on sterilizer status. As a result the user is immediately informed as soon as it is necessary to proceed with maintenance tasks. A solution that ensures excellent, longsterilizer performance reliability. lasting





S Classic incorporates the new safe and simple door closure mechanism which ensures the load can be recovered manually in the event of a power failure.

#### **RAPID COUPLINGS**



The quick coupling system for water emptying on the front section of the sterilizer simplifies and speeds up the relevant tasks.

# **FEATURES**

	17 LI.	22 LI.
Power supply voltage	220/240 V 50 Hz	
Power	2300 W	
External dimensions LxHxD	480 x 500 x 600 mm	
Chamber dimensions dxD	250 x 350 mm	250 x 450 mm
Total weight	50 kg	53 kg
Autonomy	Da 9 a 12 cicli	Da 7 a 10 cicli
Sterilizable load*	4,5 litri	4,5 litri

# **EOUIPMENT**

USB Port	$\checkmark$
Serial Port (RS 232)	<b>√</b>
Bacteriological filter	$\checkmark$
Trays	2
Tray extractor	<b>√</b>
Tray support	$\checkmark$



make access, inspection and sanitisation easy.



# Foschi B CLASSIC STERILIZER 22 LT



Made in Italy

The B Classic makes work easier by optimising times and costs. High-level quality and functions guarantee safety, reliability and ease of use. Thanks to the same external dimensions and LCD display, B Classic is a perfect solution for everyone





is able to exploit the whole cylinder of the boiler, increasing the useful space available inside the chamber.





• B Classic 22 Lt



• B Classic 22 Lt + demineralizer Pure 100 (22 LT)

# **FEATURES**

Power supply voltage	220/240 V 50 Hz
Power 2300 W	
External dimensions LxHxD	480 x 500 x 600 mm
Chamber dimensions dxD	250 x 450 mm
Total weight	54 kg
Autonomy	Da 6 a 10 cicli
Sterilizable load*	4,5 litri

# **EOUIPMENT**

USB Port	$\checkmark$	Trays	5
Serial Port (RS 232)	$\checkmark$	Tray extractor	<b>√</b>
Anti-Dust Filter	$\checkmark$	Tray support	<b>√</b>
Bacteriological filter	$\checkmark$		

#### ADVANCED OPTIONS



In the case of particularly difficult loads, B Classic lets users set a further drying stage. A delayed start option is also available, allowing users to programme the sterilization cycle at certain times.

#### INTERNATIONAL SETTINGS



More than 20 languages and the unit the B Classic sterilizer suitable for any surgery.

#### **SAFETY OPENING**



No problem in the event of a power outage: the machine hatch can be opened and the material inside it retrieved simply by undoing the lid, gaining access the closure system and opening it manually.

#### **DATA SHARING**




B Classic is equipped with an internal memory able to store up to 500 cycles. Automatically saved data can be downloaded at any time via the USB port on the front of the unit. It's also possible to display the files on any device and without any need for additional

software thanks to the PDF format.

# Foschi ELECTRO-SCALPEL

for Monopolar and Bipolar Surgery



#### **F120**

The Foschi F120 electro–scalpel is an electrosurgical unit capable of supplying current suitable for cuts, coagulating cuts, coagulation in monopolar mode and coagulation in bipolar mode, using neutral electrodes, single or bipartite.







- Digital power display
- Sound emission adjustable in 5 steps (from 55 to 75 dBA)
- Self-diagnosis of failures
- Control of accuracy of radiated power
- Possibility to connect bipartite electrodes
- Storage of last settings used
- Neutral electrode
- Duty Cycle (action/pause) in seconds
- Pedal/manual activation
- Defibrillator protection
- Equipotential plug
- ABS container

## Accessories included:

- Sterilisable handpiece with buttons
- Kit of assorted electrodes (10 pcs)
- Neutral electrode connection cable
- Steel neutral electrode
- Single airtight pedal
- 5 m power cable

## **F200**

Allows to execute surgical minimally invasive procedure of resection, evaporation and coagulation. Foschi F200 is a high frequency electrosurgical equipment which is suitable to light and medium surgery.





# FEATURES

- Maximum output power CUT: 200 W 250 Ω
- Maximum output power ENHANCED  $\Omega$ : 120W 250  $\Omega$
- Maximum output power BLEND:  $120W 200 \Omega$
- Maximum output power FORCED COAG: 150 W 150  $\Omega$
- Maximum output power SOFT COAG: 90 W 100  $\Omega$
- Maximum output power BIPOLAR COAG: 80 W  $\,$  100  $\Omega$
- Working frequency: 600 kHz
- Patient circuit: F
- Mains voltage: 115 −230 Vac
- Mains frequency: 50-60 Hz
- Electrical input power: 350 VA
- Weight Kgs: 6
- Size WxHxD mm: 370x144x319



#### **Accessories included:**

- Reusable handle with switches
- Assorted electrodes (10 pcs)
- Blade electrode 7 cm (3 pcs)
- Needle electrode 7 cm (3 pcs)
- Ball electrode 6 cm (3 pcs)
- Cable for neutral electrode
- Steel neutral electrode
- Disposable split neutral electrode (2 pcs)
- Waterproof foot switch
- Power supply cable 5mt



**AVAILABLE ON REQUEST: KIT FOR BIPOLAR SURGERY:** 



- Adapter for bipolar cable
- Bipolar Cable (3 m)
- Straight Bipolar Forceps (tips 2 mm)

## F160HF RADIO-SCALPEL

for Monopolar and Bipolar Surgery



Made in Italy

Foschi F160HF is an RF electrosurgical unit (radio-scalpel) capable of supplying current suitable for cuts, coagulating cuts, coagulation in monopolar mode and coagulation in bipolar mode.

- Pure cut
- Coagulating cut
- Deep coagulation in absence of coagulation
- Superficial coagulation
- Bipolar coagulation
- Cut with reduced production of necrosis
- Operating times programmable in thousandths







- Bipolar coagulation with automatic activation/ deactivation
- Automatic impedance control (bipolar coagulation autostart/autostop)
- Pulse interval repetition
- Timed emission (10 msec 30 sec)

- Power control via monopole-encoder
- Adjustable sound emission
- Self-diagnosis of failures
- Control of radiated power
- Control of neutral electrode contact patient
- Possibility to connect bipartite electrodes



#### **Accessories included:**

- Sterilisable handpiece with buttons
- Handpiece for microsurgery
- Kit of assorted electrodes (10 pcs)
- Needles for microsurgery/hair removal (10 pcs)
- Blade electrode (3 pcs)
- Needle electrode (3 pcs)
- Ball electrode (3 pcs)
- Neutral electrode connection cable
- Steel neutral electrode
- Bipartite neutral single use electrode (2 pcs)
- Neutral single-use electrode (2 pcs)
- Single airtight pedal
- 5 m power cable





#### **AVAILABLE ON REQUEST:**

#### **KIT FOR BIPOLAR SURGERY:**



- Bipolar Cable (3 m)
- Straight Bipolar Forceps (tips 2 mm)






## **DENTAL UNIT ON TROLLEY**



Our bestselling FOSCHI Dental unit on trolley is designed to meet the specific needs of the Veterinary professionals. This compact dental solution offers oil–free technology and combines all of the essential dental equipment you need in a single system.

Today there is a tremendous opportunity for improving the level of veterinary dental care delivered by the average practice which results in improved patient care, improved client loyalty, as well as significant financial rewards of your practice.

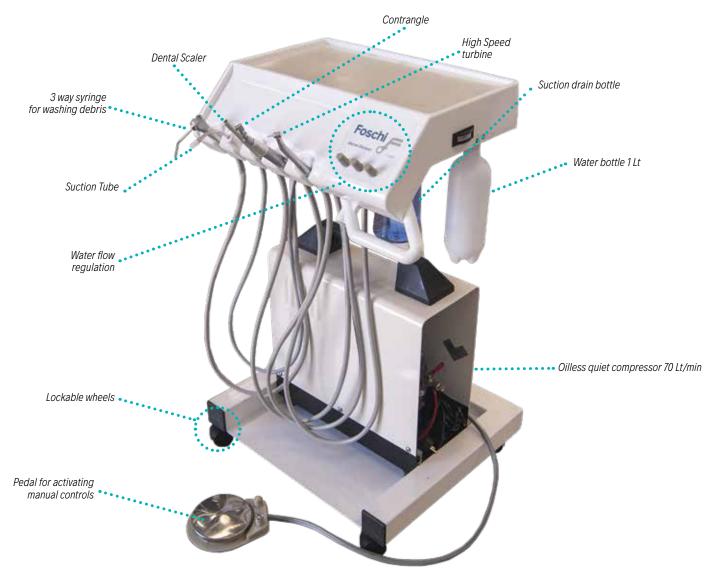

(Image shown with compressor & accessories)



#### **AVAILABLE IN 2 CONFIGURATIONS:**



MAIN UNIT + ACCESSORIES + COMPRESSOR



MAIN UNIT + ACCESSORIES

#### **ACCESSORIES INCLUDED:**

- 3 Way syringe air, water and mist (comes with spare tip)
- Suction drain bottle
- Water bottle 1 Lt
- 1 Contra Angle Handpiece 1:1 with external spray
- 1 Pneumatic Dental Scaler with Midwest Junction
- 1 Pneumatic Micromotor 20.000 rpm, 'E' type fitting, 4-way entry Midwest Junction
- 1 Standard Spray Head Turbine, 1 nozzle 380000 rpm, no fiber optics, 4-way entry Midwest Junction
- Kit of burrs: 4 burrs for turbine + 11 burrs for contra angle
- Saliva aspirator tubes, length 13 cm, 100 pieces, single use.



Angle



Handpiece for scaler



High speed turbine



20.000 rpm



Burr kit





Foschi dental unit is distributed throughout Europe and is the ideal solution for high quality at a competitive price!



# **Dental Unit Air Compressor 70 LT/MIN**

## **CONFIGURATION**

- Air return 70 liters / minute
- Air suction 115 liters
- Tank capacity 4 liters
- Two-cylinder engine
- Power 550 watts
- Noise 52 db
- Power supply 220/240 V − 50/60 Hz



## **UDS-E ULTRASOUND TOOTH SCALER**

Tooth scaler with digital control and automatic reaserch of the frequency. In addition to the standard mode that allows to increase or to reduce the intensity, the toohscaler also allows to work with the peak handpiece (that can be put in the autcoclave at 135°) with its interior in titatium and a frequency between 28/32 khz.



#### **FEATURES**

- Digital control and automatic frequency research
- Independent watering that can be selected by the operator by a 350 ml tank.
- Disinfectant solutions like clorhexidine, hypochlorite sodium, salty solutions, ect.
- Includes eight scaling tips for hygiene and prophylaxis: E1 G1 G4 G5 G6 P1 P3 P4D.





## **UDS-L ULTRASOUND TOOTH SCALER**

Ultrasound tooth scaler with control and digital frequency research. Automatic water supply system. It works on a standard mode so it is possibile to increase or to reduce the intensity, while the UDS-L also allows to work a endo mode.

RAPIDLY REMOVES PLAQUE & CALCULUS




#### **FEATURES**

- Peak handpiece (that can be put in the autoclave at 135 °C) with interior in titanium and frequency between 28/32 kHz
- Digital control and automatic frequency research
- Includes six scaling tips: E1 P1 G1x2 G2 G4
- Automatic system of water supply.



#### **SCALING TIPS**

00711837	handpiece	00721366	G5
00711838	torque lurench	00721367	G6
00721362	E1	00721361	P1
00721358	G1	00711369	P3
00721359	G2	00721370	P4
00721360	G4		

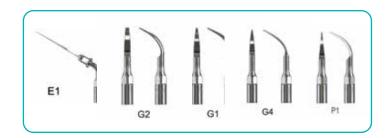

# PULSE OXIMETRY M800 VET-S1 WITH SPO,



#### STANDARD CONFIGURATION

- 2.4" LCD colour display
- SpO<sub>2</sub> technology blt 0–100%
- Heart rate 25-250 bpm
- Charger not included



#### **AVAILABLE ON REQUEST**

• Rechargeable battery + Charger





## PULSE OXIMETRY M800 VET-S1 WITH 3-LEAD ECG



#### STANDARD CONFIGURATION

- 2.4" LCD colour display
- •SpO2 technology blt 0-100%
- Heart rate 25-250 bpm
- •3-LEAD ECG
- Charger not included



#### **AVAILABLE ON REQUEST**



• Rechargeable battery + Charger



## **M9000 VET BASE**

## **Multiparametric Monitor**



#### **FEATURES**

- High resolution 12.1 " LCD display
- 3/5 Lead ECG
- Heart Rate
- Respiratory frequency
- SpO2 with BLT technology.
- Non invasive pressure (NIBP)
- Temperature (2-TEMP)

#### Software:

· dogs, cats, horse





## **INFUSION PUMP SK 600 I**

# APPLICATIONS

- Total Parenteral Nutrition (TPN)
- Critical care
- Animal transport
- Emergency medicine
- Fluid replacements
- Lipids
- Enzyme replacements
- Chronic pain management

# FEATURES

- Large and easy to use LCD display for simple set up and monitoring
- Soft key board for easy setting
- Supports multiple languages
- Infrared sensor and alarm for air detection
- Drip sensor
- Flow rate range: 1–600 ml / h (in 1 ml / h increments)
- Bolus rate: 600 ml/h;
- The application of the dual CPU system makes the pump safer and more reliable
- Compatible with any type of standard set





- Parenteral
- Intravenous
- Subcutaneous
- Percutaneous
- Intra-Arterial

## **SYRINGE INFUSION PUMP SK 500 II**

# FEATURES

- Three infusion modes: Rate Mode, Time Mode, Body Weight Mode
- Soft Keyboard for easy setting
- Hook for universal stand
- Dual CPU system that makes the infusion process safer and more reliable
- Accuracy: +/- 3%
- The injection time is indicated so that the solution can be controlled during the process
- The KVO rate prevents the formation of clots when the pump is inactive. Between 0.1 ml/h and 5 ml/h can be selected
- The device is capable of recognizing the capacity of the syringe
- The device is equipped with an alarm that automatically stops the process in case of errors or malfunctions
- In case of power failure, thanks to the built—in battery, the device will automatically save the settings
- Syringe type: 5,10, 20, 30, 50 ml
- Increment: 0,1 ml/m



## ANAESTHESIA DEVICE ON A TROLLEY VERSION

# FEATURES

- Flowmeter
- Black antistatic tube
- Pop-off fitting
- Corrugae tube
- Isoflurane keyfillers
- By-pass fitting
- Scavenging connector 22M 30F
- Steel anaesthesia trolley with blue drawers
- Foschi By-pass
- Vaporizer: fixed mount

- Attackment for circuit absorber
- Non toxic PVC pipe white for oxigen meter
- Green rubber ball anesthesia 1 lt
- Tec 3 isoflurane vapouriser
- Absorber for Komesaroffanaesthetic machine, whit gas inlet
- F-hose for Komesaroff with ballon and Y-piece
- Anesthesia balloon (0,5 L 1 L 1,5 L 2 L)
- Tracheal tube (from 2,5 mm to 10 mm)





#### **AVAILABLE ON REQUEST**



## **SEVOFLURANE SYSTEM:**

Anaesthesia Device on a Trolley version:



**SELECTATEC** 



**CAGEMOUNT** 

## **ANAESTHESIA DEVICE ON WALL VERSION**



#### **FEATURES**

- Flowmeter
- Black antistatic tube
- Pop-off fitting
- Corrugae tube
- Isoflurane keyfillers
- By-pass fitting
- Scavenging connector 22M 30F
- Foschi By–pass
- Vaporizer: fixed mount
- Attackment for circuit absorber
- Anesthesia apparatus: bar wall
- Non toxic PVC pipe white for oxigen meter
- Green rubber ball anesthesia 1 lt
- Tec 3 isoflurane vapouriser
- Absorber for Komesaroffanaesthetic machine, whit gas inlet
- F-hose for Komesaroff with ballon and Y-piece
- Anesthesia balloon (0,5 L 1 L 1,5 L 2 L)
- Tracheal tube (from 2,5 mm to 10 mm)



## **ANAESTHESIA DEVICE ON STAND VERSION**



# **FEATURES**

- Flowmeter
- Black antistatic tube
- Pop-off fitting
- Corrugae tube
- Isoflurane keyfillers
- Stanless stand
- By-pass fitting
- Scavenging connector 22M 30F
- Foschi By-pass
- Vaporizer: fixed mount
- Attackment for circuit absorber
- Non toxic PVC pipe white for oxigen meter
- Green rubber ball anesthesia 1 lt
- Tec 3 isoflurane vapouriser
- Absorber for Komesaroffanaesthetic machine, whit gas inlet
- F-hose for Komesaroff with ballon and Y-piece
- Anesthesia balloon (0,5 L 1 L 1,5 L 2 L)
- Tracheal tube (from 2,5 mm to 10 mm)





## **SEVOFLURANE SYSTEM:**

Anaesthesia Device on stand version:

**SELECTATEC** 

CODE || || || || 22006121

**CAGEMOUNT** 

**SELECTATEC** 



**CAGEMOUNT** 



00710034

## **ISOFLURANE VAPORIZER TEC 3**

The vaporizers deliver a very fine, highly accurate, and consistent dose of Isoflurane or Sevoflurane to the anesthesia machine.

# **FEATURES**

- 250cc Liquid anesthetic capacity nearly twice as much as other vaporizers.
- Flow-rate and temperature compensation device
- Constructed of high grade steel and brass with precision manufacture unequaled in the industry.
- Available for use with Isoflurane and Sevoflurane, and with funnel and key fill (pin index) options.

## SEVOFLURANE QUICK FILL VAPORIZER



- Well-fill
- Positive-locking dial to prevent unintentional engagement
- Automatic flow rate and temperature compensation
- Large sight glass for at-a-glance liquid level monitoring



**CAGEMOUNT** 



**SELECTATEC** 



**COMPATABILITY BLOCKS** 





# **VENTILATOR PLUS FOR ANAESTHESIA**

## **Model Plus**

Pulmonary ventilator for anaesthesia Plus Model, usable only for closed anaeshesia circuits and monitored data viewers



- LCD 5.5" Display
- Waves P-t, V-t
- Ventilation volume 50-1600 ml
- Respiratory frequency 1–65 BPM
- I:E ratio 8:1 1:8
- Monitored parameters : Tidal volume, MV, Ppeak, PEEP,
- Respiratory frequency, I:E ratio
- Maximum pressure alarms: Maximum 20 60 cmH2O Minimum: 0-20 cmH2O
- Dimensions 33 x 27 x 41 cm
- To use only with closed anaeshesia circuit.





## **DIGITAL PLATFORM SCALE 0-150 Kg**

with anti-slip mat



- Powered by mains
- Dimensions of platform cm 105 x 50 x 5 h
- Weighing range from 0 kg to 150 kg
- Weighing accuracy: 50 gr
- High quality FEATURES
- Digital display
- Automatic stand-by



# O<sub>2</sub> CONCENTRATOR 0-8 LT/MIN

The Oxygen concentrator is a medical device capable of retaining Nitrogen and enriching the Oxygen content of the ambient air. The product, enriched with Oxygen, then passes through a bacterial filter before going to the patient.

# **FEATURES**

- Flow: from 0 to 8 I/min
- Oxygen concentration: 93% ± 3%
- Maximum output pressure: 0.04-0.07 Mpa
- Power supply: AC230V  $\pm$  10% 50 Hz  $\pm$  1
- Noise: ≤50 dB max
- Weight: 27 kg
- Dimensions (d x I x h): 365 x 375 x 600 mm
- Electrical category: Class II type B
- Product category: Class II A

# UNIQUE The 02 concentrator is extremely silent and its price is the lowest on the market!



## LABORATORY CENTRIFUGE FOSCHI F/D-16

# **FEATURES**

- Adjustable from 0 till 4500 revolutions/min
- Integrated timer 0-60 minutes
- · Easy to use
- For eight 15 ml tubes
- the engine stops automatically if the cover is open.









# STAINLESS STEEL CAGES

Whether it's a new build or an existing kennel area FOSCHI can offer the best housing solution for all kinds of veterinary practices. Having the proper kennel supplies and equipment makes boarding cats and dogs much more comfortable for them.

With this in mind FOSCHI offers a wide range of standard stainless steel kennel assemblies, configured on years of experience and on the advice of vets and nurses. For those that require a more custom—built design, FOSCHI also offers a custom consultancy service to design a stainless steel kennel that is perfect for your patients' needs.

#### STANDARD ASSEMBLIES:

All our cages are made from the highest quality stainless steel and produced entirely in Italy. All units are 70 cm deep and are made from polished type 304 stainless steel for easy cleaning and to last a life time.

FEATURES of our standard assemblies kennels include:

- Polished type 304 stainless steel for easy clean cleaning
- •AISI 304 UNI EN 1.4301 Certification
- •Unique One-Handed Positive Lift Latch for easy access
- Easy assembly
- •'Slam action' locks allow doors to be closed easily, even when handling a patient

## FOSCHI 4-PLACE STAINLESS STEEL CAGE



#### **FEATURES**

This standard assembly 4-place kennel is composed:

- TOP ROW: 2 modules (W=61, D=70, H=61 cm)
- BOTTOM ROW: 1 module with divider plate (W= 122, D=70, H=92 cm)
- Mobile stainless steel base with wheels (H=20 cm)
- Total dimensions, including mobile base and wheels: W=122, D=77, H=173 cm.

#### Accessories on request (not included)

Code	Description
00005320	Grill floor, coated in PVC, for module A1S (1 pc)
00707702	Grill floor, coated in PVC, for module C2+D (2 pcs)

## FOSCHI 5-PLACE STAINLESS STEEL CAGE



#### **FEATURES**

This standard assembly 5-place kennel is composed:

- TOP ROW: 3 modules (W=61, D=70, H=61 cm)
- BOTTOM ROW: 1 module with divider plate (W=183, D=70, H=92 cm)
- Mobile stainless steel base with wheels (H=20 cm)
- Total dimensions, including mobile base and wheels: W=183, D=77, H=173 cm.

#### Accessories on request (not included)

	Code	Description
3х	00005320	Grill floor, coated in PVC, for module A1S (1 pc)
	00710395	Grill floor, coated in PVC, for module D2+D (2 pcs)



#### **FEATURES**

This standard assembly 5-place kennel is composed:

- TOP ROW: 1 module, with 2 dividers (W=127, D=70, H=61 cm)
- BOTTOM ROW: 1 module, with 1 divider (W=127, D=70, H=95)
- Mobile stainless steel base with wheels (H=20 cm)
- Total dimensions, including mobile base and wheels: W=127, D=77, H=176 cm.

#### Accessories on request (not included)


Code	Description
00707701	Grill floor, coated in PVC, for module A3+D (1 pc)
00707702	Grill floor, coated in PVC, for module C2+D (2 pcs)

АЗ

C2


## OTHER STANDARD ASSEMBLIES ON REQUEST






4-PLACE (C2/C2) Total dimensions: W=127, D=77, H=203 cm

CODE 00005625




5-PLACE (C2-C1/D2) Total dimensions: W=190, D=77, H=203 cm






6-PLACE (A1Sx2/A1Sx2 /A1Sx2) Total dimensions: W=127, D=77, H=203 cm






A1S 7-PLACE (A1Sx2/A1Sx2/ A3+D) Total dimensions: A1S W=127, D=77, H=193 cm






8-PLACE (A3+D/A3+D/ C2+D) Total dimensions: W=127, D=77, H=228 cm

CODE 00005628



8-PLACE (A3+D/A1Sx2/A3+D) Total dimensions: W=127, D=77, H=193 cm





9-PLACE (A3+D/A3+D/A3+D) Total dimensions: W=127, D=77, H=193 cm

CODE 00005622



9-PLACE (A3+D-A1S/ A1Sx3/D2+D) Total dimensions: W=190, D=77, H=238

CODE 00005400

## FOSCHI 5-PLACE STAINLESS STEEL CAGE ON CABINET




TOP ROW: 1 module, 2 dividers BOTTOM ROW: 2 modules

CABINET: laminate cabinet with 2 drawers, 2 doors.

Total dimensions: W=127, D=77, H=216 cm.





## FOSCHI 2-PLACE STAINLESS STEEL CAGE ON CABINET



TOP ROW: 2 modules

CABINET: laminate cabinet with 4 drawers, 1 door.

Total dimensions: W=127, D=77, H=156 cm.









#### Mobile Oxygen Unit


This single unit on wheels features our Oxygen Therapy door that helps provide additional oxygen to support patients in need. The castor wheels allow mobility and moving the patient without stress. The O2 door is in Plexiglass and provides a low-stress method of O2 delivery.

Total dimensions: W=94, D=60, H=92 cm





## STAINLESS STEEL CAGES ACCESSORIES



#### **LUX Lamp-holder**

Code	Description	
00711619	Stainless steel pole for heating lamp LUX (Fig. 1)	
00677004	Aluminum reflector for heating lamp LUX with 5 mt cable (Fig. 2)	
00691001	Infrared heating bulb 150 W (Fig. 3)	
00691002	Infrared heating bulb 250 W (Fig. 3)	



#### LUX clamp-on IV Pole

Entirely made of stainless steel, easily clamps on to the cage door and is adjustable in height.





#### **Record holder**

Entirely made of stainless steel, hooks easily to cage door for holding patient's records.






#### **Oxygen Therapy Door**

Made of clear polycarbonate for unobstructed patient view.

Code	Description
00721821	Oxygen therapy door H=60 cm; fits module A1S
00005632	Oxygen therapy door H=60 cm; fits module A3+D
00005875	Oxygen therapy door H=95 cm; fits module C1
00721823	Oxygen therapy door H=95 cm; fits module C2+D
00005633	Oxygen therapy door H=95 cm; fits module D2+D





Code	Description
00005320	Grill floor, coated in PVC, for module A1S (1 pc)
00707701	Grill floor, coated in PVC, for module A3+D (3 pcs)
00710394	Grill floor, coated in PVC, for module C1 (1 pc)
00707702	Grill floor, coated in PVC, for module C2+D (2 pcs)
00710395	Grill floor, coated in PVC, for module D2+D (2 pcs)

# **PVC CAGES**

These cages are made out of molded polyethylene. The doors and the mobile base are made out of the highest quality stainless steel. They represent a highly cost-effective solution for animal housing.

The PVC is corrosion—resistant and guarantees easy sanitation and durability.

## **4-PLACE PVC CAGE**







#### **FEATURES**

- •Thickness 8 mm
- •TOP ROW: 2 modules (W=65, D=74, H=83,5 cm)
- •BOTTOM ROW: 1 module (W=131, D=74, H=84 cm)
- •Mobile stainless steel base with wheels (H=20 cm)
- •Total dimensions, including mobile base and wheels: W=131, D=80, H=180 cm.

#### Accessories on request (not included)

	Code	Description
2x	00707699	Stainless steel grill floor, PVC coated, for top/bottom single modules
	00700001	Stainless steel grill floor, PVC coated, for bottom right (module with divider)
	00700003	Stainless steel grill floor, PVC coated, for bottom left (module with divider)
	00710031	Stainless steel collecting container, for top/ bottom single modules
	00700002	Stainless steel collecting container, for bottom right (module with divider)
2x	00700004	Stainless steel collecting container, for bottom left (module with divider)









#### **FEATURES**


- Thickness 8 mm
- TOP ROW: 3 modules (W=65, D=74, H=83,5 cm)
- BOTTOM ROW: 1 module with divider W=131, D=74, H=84 cm + 1 module W=65, D=74, H=84 cm.
- Mobile stainless steel base with wheels (H=20 cm)
- Total dimensions, including mobile base and wheels: W=196, D=80, H=180 cm.

	Access Code	Ories on request (not included)  Description
4x	00707699	Stainless steel grill floor, PVC coated, for top/bottom single modules
	00700001	Stainless steel grill floor, PVC coated, for bottom right (module with divider)
	00700003	Stainless steel grill floor, PVC coated, for bottom left (module with divider)
4x	00710031	00710031 Stainless steel collecting container, for top/bottom single modules
	00700002	Stainless steel collecting container, for bottom right (module with divider)
	00700004	Stainless steel collecting container, for bottom left (module with divider)





## **PVC CAGES ACCESSORIES**



#### **LUX LAMP-HOLDER**

Code	Description
00711619	Stainless steel pole for heating lamp LUX (Fig. 1)
00677004	Alluminum reflector for heating lamp LUX with 5 mt cable (Fig. 2)
00691001	Infrared heating bulb 150 W (Fig. 3)
00691002	Infrared heating bulb 250 W (Fig. 3)



#### **LUX CLAMP-ON IV POLE**

Entirely made of stainless steel, easily clamps on to the cage door and is adjustable in height.





#### **RECORD HOLDER**

Entirely made of stainless steel, hooks easily to cage door for holding patient's records.





#### **OXYGEN THERAPY DOOR**

Made of clear polycarbonate for unobstructed patient view.





#### **COATED GRILL FLOORS & COLLECTING CONTAINERS**

Code	Description
00707699	Stainless steel grill floor, PVC coated, for top/bottom single modules
00700001	Stainless steel grill floor, PVC coated, for bottom right (module with divider)
00700003	Stainless steel grill floor, PVC coated, for bottom left (module with divider)
00710031	Stainless steel collecting container, for top/ bottom single modules
00700002	Stainless steel collecting container, for bottom right (module with divider)
00700004	Stainless steel collecting container, for bottom left (module with divider)

# WALK-IN KENNELS

FOSCHI offers a wide range of walk-in kennel solutions that are designed specifically for you and your patients' needs. A variety of walk-in kennel doors are available from toughened glass, gated, combination of glass and gate and critical care.

Our wealth of experience in designing walk-in kennels and run areas for veterinary Hospitals and clinics allow us to help design the best option for your needs, at all levels.









## FOSCHI HYDRAULIC V-TOP SURGICAL TABLE

The V–Top acts as a helper during surgery, keeping the patient in the correct position. Gives you the flexibility to go from straight horizontal and level, to V–Shaped, near vertical positioning without external devices.



### **FEATURES**

- Entirely made out of AISI 304 stainless steel
- Folding adjustable V-Top with 8/10 thickness
- Trendelenburg lifting system, with 2 independent hydraulic pumps
- Drainage system: 2 lateral stainless steel reservoirs that slides out, for easy cleaning
- Attachment rails for accessories, such as cleats
- Foot operated

#### **DIMENSIONS:**

: 142 x 55 cm Weight: 95 kg

Adjustable height: from 90 to 110 cm

Max weight: 100 kg









## ACCESSORIES ON REQUEST (not included)

Code	Description
00711827	Quick release cam cleat tie-down attachments
00711828	Cam cleat tie-down attachment with 12 mm ø hole
00711829	Stainless steel instrument tray (40x30) with support pole, $35x35$ cm.
00911830	Stainless steel bridge support
00000336	Removable grid with collection basin for dental procedures



## STAINLESS STEEL ELECTRIC SURGICAL TABLE (TO-140)

The FOSCHI TO-140 V-Top Table features two stainless steel table panels for positioning animals in the best position during all procedures. It also features an easy to clean removable gutter with a drain. The table tops tilt from level to 35° via one-hand control. The table top and V-panels are counterbalanced for easier positioning of the patient.



#### **TECHNICAL SPECIFICATIONS**

- Adjustable top panels: 0 35° "V"
- Top panels open completely for thorough and easy cleaning
- Bidirectional tilt mechanism: 15° (gutter side) and 30° (other side)
- Entirely made of AISI 304 stainless steel
- Foot operated for hands-free height adjustment (78 to 108 cm)
- Weight capacity 180 kg
- Tabletop dimensions (in cm): W=145 x D=56



## ACCESSORIES ON REQUEST (not included)









00712277

## FOSCHI EXAMINATION FLAT-TOP TABLE



#### TECHNICAL SPECIFICATIONS

- Entirely made out of AISI 304 stainless steel
- Stainless steel exam top is 130 x 60 cm, with raised edges to prevent fluid run-off
- Hands free height adjustment from 27 to 105 cm high
- Foot switch engages a quiet, electric actuator system that lifts up to 100 kg smoothly



#### **WITH SCALE**

- Incorporated scale
- Weighing capacity up to 150 kg
- Weighing precision: 50 gr



## **CONSULTING STAINLESS STEEL TABLE**

# 9

## **FEATURES**

- Entirely made out of AISI 304 stainless steel
- Lateral reservoir for fluid collection
- Adjustable feet

#### **DIMENSIONS:**

 $W=130 \times D=60 \times H=89 \text{ cm}$ 






## **FOSCHI ARTHANE® TABLE MAT**

#### (polimero elastomero)

The Arthane® Table Mat by Foschi is a high—quality exam table mat designed to stabilize pets on exam tables and other clinic surfaces leading to a more stress—free veterinary visit. This Mat is specifically designed for use in animal hospitals by making it non—slip, easy to clean, and highly durable to withstand the wear and tear from animals, while maintaining a balance of softness to ensure comfort for pets.

#### **BENEFITS**

- Reduces stress and anxiety for pets by providing a better surface grip
- Easy to disinfect by wiping the surface or handwashing
- Non-skid padded bottom layer secures and stabilizes mat onto surfaces
- Protection of the table from scratches

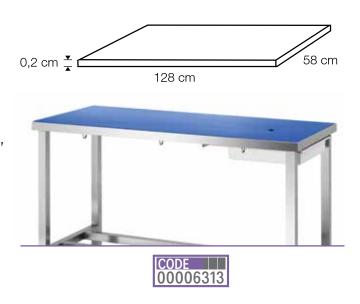

## **CONSULTING STAINLESS STEEL TABLE WITH WHEELS**



#### **FEATURES**

- Entirely made out of AISI 304 stainless steel
- Lateral reservoir for fluid collection
- 4 lockable swivel castors

#### **DIMENSIONS:**

 $W=130 \times D=60 \times H=89 \text{ cm}$ 





## **FOLD UP STAINLESS STEEL EXAM TABLES**

Fold up to use, fold down to store. Entirely made out of AISI 304 stainless steel. Wall mounted. Flat sheet top. Working load 25kg (can vary, dependent on wall type and fixings used).

#### **DIMENSIONS:**

 $W=58 \times D=100 \times H=102 \text{ cm}$ Wall-mounted side: W=58 cm





## **FOSCHI STAINLESS STEEL TUB TABLE**

Entirely made out of AISI 304 stainless steel, this multi-purpose table features a stainless steel sink with a removable stainless steel grill and a mixer tap (hot/cold) with extractable shower. This table provides you with flexibility for all of your daily surgical procedures and dental services, as well as your other daily needs.



#### **INCLUDED**

 The stainless steel grill, mixer tap and extractable shower are included

#### **DIMENSIONS:**

 $W=140 \times D=70 \times H=86 \text{ cm}$ 







## **ACCESSORIES ON REQUEST**

Code	Description
00000370	Removable solid stainless steel top (turns the

## **FOSCHI TUB TABLE WITH CABINET**

Entirely made out of AISI 304 stainless steel, this multi-purpose table features a stainless steel sink with a removable stainless steel grill, a mixer tap (hot/cold) with extractable shower and a choice of cabinet styles. The tub has knee space for added convenience and comfort during dental or other procedures.



#### **INCLUDED**

 The stainless steel grill, mixer tap and extractable shower are included.

#### **DIMENSIONS:**

 $W=140 \times D=70 \times H=93 \text{ cm}$ 

CODE	COLOR	
20005878	green	
20005877	blue	
20005876	white	$\bigcirc$
20006662	red	



# **SURGEON'S SCRUB SINKS**

### SINGLE SURGEON'S SCRUB SINK



#### **FEATURES**

Durable AISI 304 stainless steel construction. The sink includes:

- Single lever faucet with mixer tap (hot/cold)
- 1 soap dispenser (stainless steel)
- 1 brush dispenser (stainless steel)

#### **DIMENSIONS:**

(cm): W=80





FOR ALL OUR SCRUB SINKS! CALL US KNOW OR MORE INFO.

**DOUBLE SURGEON'S SCRUB SINK** 



### **FEATURES**

Durable AISI 304 stainless steel construction. The sink includes:

- 2 single lever faucets with mixer tap (hot/cold)
- 1 soap dispenser (stainless steel)
- 1 brush dispenser (stainless steel)

#### **DIMENSIONS:**

(cm): W=130





SINKS! CALL US KNOW

# **KNEE OPERATED SURGEONS SCRUB SINK**

Wall mounted, durable AISI 304 stainless steel construction, the sink is knee operated and has a Gooseneck Swivel Sink Faucet. Ready to be installed.





### **FOSCHI SERVING TROLLEY**

with non-toxic ABS (Acrylonitrile butadiene styrene) top

#### **DIMENSIONS:**

 $W=60 \times D=30 \text{ cm}$ 



#### **FOSCHI MAYO SERVING TROLLEY**

Entirely made of stainless steel, this best–selling trolley is a perfect aid in daily tasks and procedures. Easy to clean, this trolley with wheels features an extractable raising top to provide additional mobile workspace throughout your facility. The foot break on the wheel allows to control movement easily. Height of the top is adjustable manually.



### **FOSCHI BRIDGE SERVING TROLLEY**

This trolley is designed to be easy to clean, easy to transport and durable. The height is adjustable manually and the **top is completely removable**. 4 swivel wheels, 2 with breaks. Base is crome-plated steel and the removable tray is stainless steel.

#### **DIMENSIONS:**

 $W=76 \times D=42 \times H=90-140 \text{ cm}.$ 



### **INOX STRETCHER ON WHEELS**

This multi-function mobile stretcher solves your transport issues, especially for injured and post-op animals. The top is removable and becomes a stretcher with handles.

It has 4 swivel wheels, 2 with breaks.

#### **DIMENSIONS:**

 $W=130 \times D=50 \times H=83 \text{ cm}$ 



### **MOBILE STRETCHER**

Allows easy transport of any dog or other small animal, for emergencies, recovery, or other pet-care situation. Made of washable, durable, PVC and an aluminum frame, the stretcher features 2 rear wheels for dragging and 2 velcro easy-adjusting body straps.

#### **DIMENSIONS:**

 $W=120 \times D=50 \text{ cm}$ .





#### **FOLDING STRETCHER**

The stretcher is constructed of easy-to-clean and durable, reinforced PVC and aluminum frame. The PVC cloth measures 100 x 50 cm when open. When folded, the stretcher measures 63 x 13 cm width, so storage is no problem.

#### **DIMENSIONS:**

 $W=120 \times D=52 \times H=80 \text{ cm}$ .



### **MOBILE STRETCHER WITH WHEELS**

This transport stretcher has a totally removable gurney top in reinforced PVC, with easy—adjusting body straps. The steering handles at both ends aid when turning sharp corners and maneuvering in tight spaces. The large casters make it even more nimble, and they lock securely when it needs to be parked. 4 swivel wheels, 2 with breaks.

#### **DIMENSIONS:**

 $W=120 \times D=52 \times H=80 \text{ cm}$ 



#### ANAESTHESIA STAND

Structure made of stainless steel. This trolley accommodates the flow meter and has two bottle cradles complete with chains. It has 4 anti–static wheels, including 2 braked. On the back side of the trolley there is room for the cylinders.

#### **DIMENSIONS:**

W=41 x D=70 x H=153 cm



### ANAESTHESIA STAND WITH TRAY

Stainless steel construction and 3 trays (for the oxygen concentrator, for the patient monitor and for the ventilator). The stand features two bottle cradles complete with chains, 4 anti-static wheels, including 2 braked.

#### **DIMENSIONS:**

W=41 x D=70 x H=153 cm




# **ANAESTHESIA STAND ON TROLLEY**

Stainless steel construction with 2 stainless steel trays and a cabinet with 2 drawers.

#### **DIMENSIONS:**

 $W=54 \times D=53 \times H=152 \text{ cm}$ 



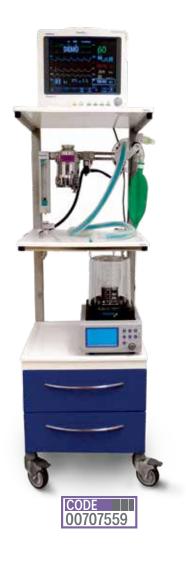

# **TROLLEY**

**FOSCHI's new Clinical Veterinary Carts series** offers features that are unparalleled in the veterinary mobile storage market. These tough, durable carts are designed to meet the demands you have today and make change easy **as your needs change**. A modular cart system means universal sizes and easily interchangeable drawers and accessories.

Procedure/supply cart, utility cart, med/surg supply cart, linen storage cart—a variety of cart bodies and a wide selection of modular, lightweight, interchangeable interior FEATURES and accessories make it **easy to create the cart you need.** 

Designed for heavy use, our carts are made of **highly durable**, **impact-resistant plastic with color integrated**, so there is no color chipping, fading, denting, or rusting, even if surfaces are scratched.

Our flexible and adaptable solution expands your storage and transport capabilities, saves you time and money, and improves efficiency and productivity!




# **ARTIDE**

### **Emergency Trolley**







#### **Drawer dividers**



60220096	Organizer for small drawer (A)
60220093	Organizer for medium drawer (B)
60220090	Organizer for tall drawer (C)




**CUSTOMIZABLE** in other colors Choose yours on the site www.coloriral.it

# **EUROPA**

### **Clinical Trolley**







#### **Drawer dividers**





60220093	Organizer for medium drawer (B)
60220090	Organizer for tall drawer (C)

### **AFRICA**

#### **Clinical Trolley**



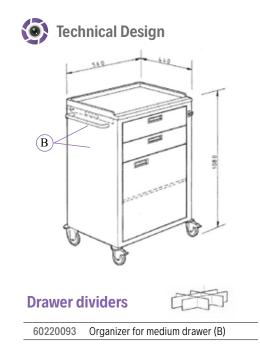




# **AMERICA**

#### **Clinical Trolley**



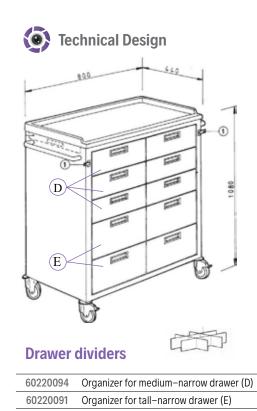

**GREEN 6029** 

YELLOW 1016

**CUSTOMIZABLE** in other colors

Choose yours on the site www.coloriral.it

**RED 3000** 

### **OCEANIA**


#### **Clinical Trolley**



# **ASIA Clinical Trolley**








60220094 Organizer for medium-narrow drawer (D) 60220091 Organizer for tall-narrow drawer (E)

# **CART ACCESSORIES**

60220018 Catheter tubes/holder Fig. 2 60220076 Pull out side tray Fig. 3 60220011 Reclinable top Fig. 4 60220086 Dispenser for cups in abs Fig. 5 60220083 Steel iv pole Fig. 6 60220082 Bridge with 2 rows of tipping boxes (5 top + 4 bottom) Fig. 7 60220013 Vial holder Fig. 8 60220020 Support for aspirator Fig. 9 60220079 Support for disinfection basin Fig. 10 60220080 Vertical tray Fig. 11 60220100 Support for kidney dish Fig. 12 60220014 Sharps bin holder Fig. 13 60220089 Knee operated waste bin Fig. 14 60220003 Support for 20 It hazardous medical wastes carton Fig. 15 60220016 Support for oxygen bottle Fig. 16 60220081 Bridge single row of 5 tipping boxes Fig. 17		
60220076 Pull out side tray Fig.3 60220011 Reclinable top Fig.4 60220086 Dispenser for cups in abs Fig.5 60220083 Steel iv pole Fig.6 60220082 Bridge with 2 rows of tipping boxes (5 top + 4 bottom) Fig.7 60220013 Vial holder Fig.8 60220020 Support for aspirator Fig.9 60220079 Support for disinfection basin Fig.10 60220080 Vertical tray Fig.11 60220100 Support for kidney dish Fig.12 60220014 Sharps bin holder Fig.13 60220089 Knee operated waste bin Fig.14 60220003 Support for 20 It hazardous medical wastes carton Fig.15 60220016 Support for oxygen bottle Fig.16	60220001	Centralized locking Fig. 1
60220086 Dispenser for cups in abs Fig.5 60220083 Steel iv pole Fig.6 60220082 Bridge with 2 rows of tipping boxes (5 top + 4 bottom) Fig.7 60220013 Vial holder Fig.8 60220020 Support for aspirator Fig.9 60220079 Support for disinfection basin Fig.10 60220080 Vertical tray Fig.11 60220100 Support for kidney dish Fig.12 60220014 Sharps bin holder Fig.13 60220089 Knee operated waste bin Fig.14 60220003 Support for 20 It hazardous medical wastes carton Fig.15 60220016 Support for oxygen bottle Fig.16	60220018	Catheter tubes/holder Fig.2
60220086 Dispenser for cups in abs Fig.5 60220083 Steel iv pole Fig.6 60220082 Bridge with 2 rows of tipping boxes (5 top + 4 bottom) Fig.7 60220013 Vial holder Fig.8 60220020 Support for aspirator Fig.9 60220079 Support for disinfection basin Fig.10 60220080 Vertical tray Fig.11 60220100 Support for kidney dish Fig.12 60220014 Sharps bin holder Fig.13 60220089 Knee operated waste bin Fig.14 60220003 Support for 20 It hazardous medical wastes carton Fig.15 60220016 Support for oxygen bottle Fig.16	60220076	Pull out side tray Fig.3
60220083 Steel iv pole Fig.6 60220082 Bridge with 2 rows of tipping boxes (5 top + 4 bottom) Fig.7 60220013 Vial holder Fig.8 60220020 Support for aspirator Fig.9 60220079 Support for disinfection basin Fig.10 60220080 Vertical tray Fig.11 60220100 Support for kidney dish Fig.12 60220014 Sharps bin holder Fig.13 60220089 Knee operated waste bin Fig.14 60220003 Support for 20 It hazardous medical wastes carton Fig.15 60220016 Support for oxygen bottle Fig.16	60220011	Reclinable top Fig.4
60220082 Bridge with 2 rows of tipping boxes (5 top + 4 bottom) Fig.7 60220013 Vial holder Fig.8 60220020 Support for aspirator Fig.9 60220079 Support for disinfection basin Fig.10 60220080 Vertical tray Fig.11 60220100 Support for kidney dish Fig.12 60220014 Sharps bin holder Fig.13 60220089 Knee operated waste bin Fig.14 60220003 Support for 20 It hazardous medical wastes carton Fig.15 60220016 Support for oxygen bottle Fig.16	60220086	Dispenser for cups in abs Fig.5
60220013 Vial holder Fig.8 60220020 Support for aspirator Fig.9 60220079 Support for disinfection basin Fig.10 60220080 Vertical tray Fig.11 60220100 Support for kidney dish Fig.12 60220014 Sharps bin holder Fig.13 60220089 Knee operated waste bin Fig.14 60220003 Support for 20 It hazardous medical wastes carton Fig.15 60220016 Support for oxygen bottle Fig.16	60220083	Steel iv pole Fig.6
60220020 Support for aspirator Fig.9 60220079 Support for disinfection basin Fig.10 60220080 Vertical tray Fig.11 60220100 Support for kidney dish Fig.12 60220014 Sharps bin holder Fig.13 60220089 Knee operated waste bin Fig.14 60220003 Support for 20 It hazardous medical wastes carton Fig.15 60220016 Support for oxygen bottle Fig.16	60220082	Bridge with 2 rows of tipping boxes (5 top + 4 bottom) Fig.7
60220079 Support for disinfection basin Fig.10 60220080 Vertical tray Fig.11 60220100 Support for kidney dish Fig.12 60220014 Sharps bin holder Fig.13 60220089 Knee operated waste bin Fig.14 60220003 Support for 20 It hazardous medical wastes carton Fig.15 60220016 Support for oxygen bottle Fig.16	60220013	Vial holder Fig.8
60220080 Vertical tray Fig.11 60220100 Support for kidney dish Fig.12 60220014 Sharps bin holder Fig.13 60220089 Knee operated waste bin Fig.14 60220003 Support for 20 It hazardous medical wastes carton Fig.15 60220016 Support for oxygen bottle Fig.16	60220020	Support for aspirator Fig.9
60220100 Support for kidney dish Fig.12 60220014 Sharps bin holder Fig.13 60220089 Knee operated waste bin Fig.14 60220003 Support for 20 lt hazardous medical wastes carton Fig.15 60220016 Support for oxygen bottle Fig.16	60220079	Support for disinfection basin Fig.10
60220014 Sharps bin holder Fig.13 60220089 Knee operated waste bin Fig.14 60220003 Support for 20 It hazardous medical wastes carton Fig.15 60220016 Support for oxygen bottle Fig.16	60220080	Vertical tray Fig.11
60220089 Knee operated waste bin Fig.14 60220003 Support for 20 It hazardous medical wastes carton Fig.15 60220016 Support for oxygen bottle Fig.16	60220100	Support for kidney dish Fig.12
60220003 Support for 20 lt hazardous medical wastes carton Fig.15 60220016 Support for oxygen bottle Fig.16	60220014	Sharps bin holder Fig.13
60220016 Support for oxygen bottle Fig.16	60220089	Knee operated waste bin Fig.14
	60220003	Support for 20 lt hazardous medical wastes carton Fig.15
60220081 Bridge single row of 5 tipping boxes Fig.17	60220016	Support for oxygen bottle Fig.16
	60220081	Bridge single row of 5 tipping boxes Fig.17

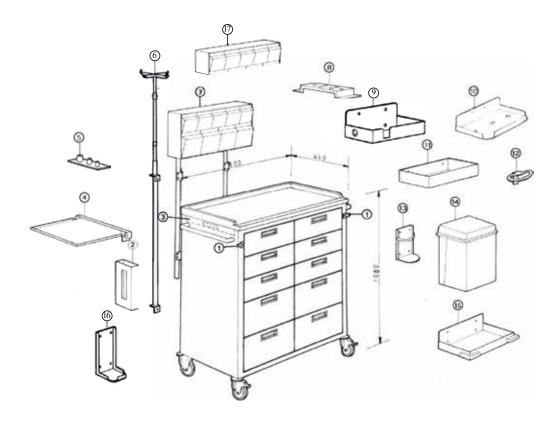

When your needs change, just exchange the FEATURES to create new functionality.

### **MULTI 640**

This multi-purpose medical cart features 4 drawers and a tank holder in the back. It is made of paint-coated metal and non-toxic ABS (Acrylonitrile butadiene styrene). The tray is manually adjustable in height and direction.



### **MULTI 620**

This multi-purpose medical cart features 1 door and 1 drawer and a tank holder in the back. It is made of paint-coated metal and non-toxic ABS (Acrylonitrile butadiene styrene). The tray is manually adjustable in height and direction.



### SHUTTER DOOR BASKET CABINETS

Our FOSCHI medical cabinet range offers the best solution for all your practice's needs.

All cabinets include ISO medical basket modules that are interchangeable and are on castors for easy mobility. All models are available with have lockable **shutter doors** or **glass doors**.

Ideal for the storing of medical consumables and equipment, these cabinets are easy to maneuver and push, even when fully loaded. Operation is self-evident, and it's easy for staff to add, remove, and change baskets.



#### **FEATURES**

- ISO 3394 baskets made of non-toxic, easy-to-clean, ABS (Acrylonitrile butadiene styrene) baskets
- Organizers for the baskets make it easy to store and find consumables and equipment
- Two robust handles make it easy to maneuver and push, even when fully loaded

#### **A1 CABINET WITH SHUTTER DOOR**

Measures:

 $W=720 \times D=500 \times H=1950 \text{ cm}$ 




#### A1 CABINET WITH GLASS DOORS


Measures:


 $W=720 \times D=500 \times H=1950 \text{ cm}$ 



















#### **A2 CABINET WITH SHUTTER DOOR**

Measures:

W=520 x D=700 x H=1950 cm

CODE 00500091

#### **A2 CABINET WITH GLASS DOORS**

Measures:

W=520 x D=700 x H=1950 cm

CODE 00005547

# **FOSCHI CLINICAL FURNITURE**

**Made in Italy.** These words make every Italian manufacturer proud and FOSCHI is first in line in promoting the excellence of this brand in the world, at an affordable price. Italian products and goods are known and highly appreciated for their top quality, attention to details and innovative design. All these factors are the key success factors of our brand new Clinical Furniture Line, that has been designed to offer hygiene, comfort and design to veterinary health professionals and their patients.

**Make it yours.** Regardless of the size of your practice or your equipment specification, FOSCHI has the capability to customize a solution tailored to your needs. The look and feel of your environment speaks volumes about your business, and sets the mood when your patients walk through the front door. Our specialists will help you choose the best solution for you, in order to create something that's all you and to make the most out of your investment.

**Make it last.** Creating a space that's all you, also means having the flexibility to reconfigure down the road as your needs change. FOSCHI's clinical furniture is a modular system that allows you to change from drawers to doors or vice versa. And, if your growing practice leads you to a new location, rest assured: You can take this furniture with you.



# **CLINICAL FURNITURE**



Made in Italy



# YOU IMAGINE, WE CREATE

- + SPACE PLANNING
- + CUSTOMIZED SOLUTIONS
- + HANDCRAFTED FINISHES
- + ANALYSIS OF CRITICAL POINTS
- **INNOVATIVE MATERIALS**
- **+** WIDE RANGE OF ITEMS

# WITH US YOUR IDEAS COME TRUE



With every project we complete we gain a better insight into what practices need from this important space. Our focus is on creating a great working environment, providing the room you need to attend to patients.

Whether you're looking to renovate a small one consultation room practice or build a new hospital, we can help by working closely with the veterinarians and their team.

Here are some examples of what we can acheive together.









### **SIMPLE LINEAR**

- Dimensions: W= 2000 x D= 500 mm
- Composition of 4 modules (500 mm)
- Colors: the base is white (RAL 9003), while you can choose your favorite color for door and drawers
- Handles: chromed curved handles
- Work top: quarz white laminated work top
- Sink: polycarbonate, white





### **SIMPLE PLUS**

- Dimensions: W=2025 x D=1025 x H=500 mm
- Composition of 4 modules (500 mm) + 1 angular module (W=750 x D=500 mm)
- Colors: base is white (RAL 9003), while you can choose your favorite color for door and drawers
- · Handles: chromed curved handles
- Worktop: quarz white laminated work top
- · Sink: polycarbonate, white





### **SIMPLE STERIL**

- Dimensions: W=1500 x D=600
- Bottom Composition of 3 modules (500 mm)
- Wall mounted: 1 cabinet (W=500 mm), with 2 sliding glass doors (W=1000 mm)
- Colors: base is white (RAL 9003), while you can choose your favorite color for door and drawers
- Handles: chromed curved handles
- Worktop: quarz white laminated work top
- Sink: polycarbonate, white













**Veterinary Solutions** 



